

TX-AAWTS10


THERMOSTAT

ACCESSORIES


Characteristics	M.U.	TX-AAWTS10
Setting range	°C	5-60
Switch difference	K	4,0/0,5*
Contact	-	Change-over
Switching capacity (resistive load)	A	10
Max. tension	V	250 AC
Dimensions HxWxD	mm	67x50x38
Sensor element	-	Bimetal
Electrical connection	-	4-pole terminal (2,5 mm ²)
Operating temperature limits	°C	-20 +80
Protection level EN60529	-	IP20
Mounting on clip for DIN bar	mm	35
Weight	kg	0,1
Conformity	-	CE

Accessories/Options	
Pack of 5 devices installation accessory for electric enclosures	TX-AAWFT10

*By connecting terminal N as the diagram we can reduce the triggering differential to 0,5 K

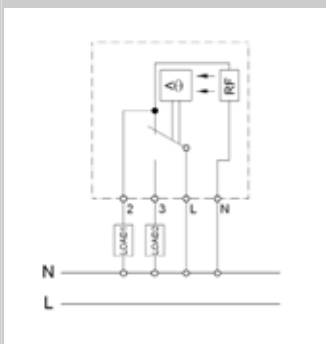

Dimensions

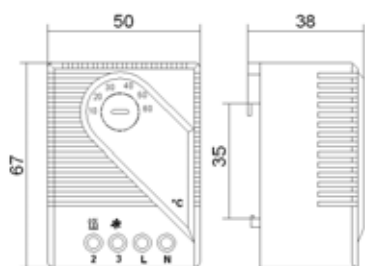

Thermostat with a high capacity change-over contact and also, thanks to the heat feed-back on the bimetal element, a triggering differential of only 0,5 K.

