

BIT25


AIR-WATER EXCHANGERS FOR ROOF MOUNTING

| Characteristics | M.U. | TX-BIT25CX0A |
|--|--------|--------------------------------|
| Cooling capacity EN814 - W10A35 | W | 2500 |
| Water flow rate | l/h | 500 |
| Power supply | V ~ Hz | 115 1~ 50-60 |
| Width | mm | 400 |
| Height | mm | 270 |
| Depth | mm | 542 |
| Max. current | A | 0,62 |
| Fuse T | A | 2 |
| Absorbed electric power EN814 - W10A35 | W | 67 |
| Duty cycle | - | 100% |
| Electrical connection | - | cabl e L = 3 m |
| Refrigerant | - | WATER |
| Hydraulic circuit max. pressure | bar | 5 |
| Air flow rate | m3/h | 750 |
| Internal temperature range | °C | 20-60 |
| External temperature range | °C | 1-70 |
| Protection level EN60529 | - | IP55 |
| Noise level | dB (A) | 58 |
| Weight | Kg | 19 |
| Colour | - | RAL 7032 ORANGE PEEL EFFECT |
| Conformity | - | CE |

| Accessories/Optionals | |
|----------------------------------|--------------|
| Thermostat 20-46°C, gas bulb 15A | TX-C16000002 |
| Solenoid valve, NC | TX-C15000119 |
| Level switch, NO | TX-C16000140 |
| Stainless steel version | |
| Special paint on request | |





Performances

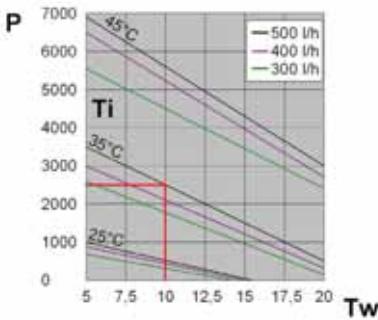

P = Cooling capacity (W)
Tw = Inlet water temperature (°C)
Ti = Inside enclosure temperature (°C)

Dimensions

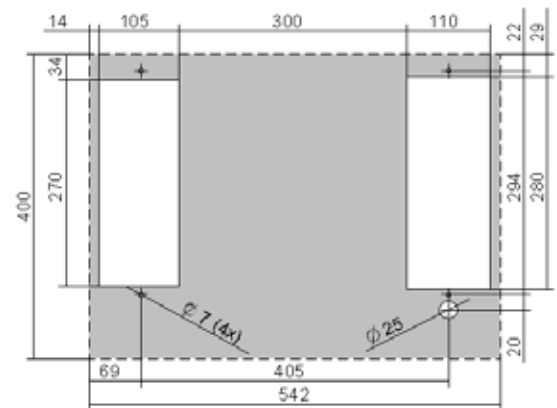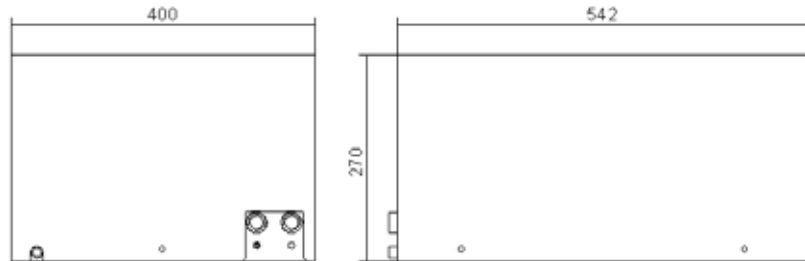

Drilling template

Composition of the supply

- Ready-to-install air-water exchanger
- Self-adhesive seal for coupling to the enclosure
- Installation, operating and maintenance manual
- Drilling template in 1:1 scale
- Assembly accessories