




BLU10

Air-Water Heat Exchangers - Door or Wall Mounting

Characteristics	M.U.	TX-BLU10BX0B	TX-BLU10CX0B
Cooling capacity - W10A35	W	1000	1000
Water flow rate	l/h	150	150
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Height	mm	450	450
Width	mm	310	310
Depth	mm	115	115
Max. current	A	0.17	0.38
Fuse T	A	2	2
Absorbed power - W10A35	W	25	29
Duty cycle	-	100%	100%
Electrical connection	-	Cable L=3m	Cable L=3m
Refrigerant	-	Water	Water
Hydraulic circuit max. pressure	bar	5	5
Water connections	-	3/8"G	3/8"G
Air flow rate	m ³ /h	330	330
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
Protection level EN60529	-	IP55	IP55
Noise level	dB (A)	55	55
Weight	kg	12	12
Conformity	-	CE	CE
Colour	-	RAL7035 ripple finish	



Performance Chart

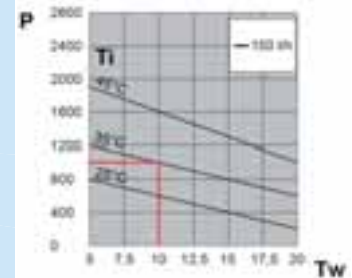

P = Cooling capacity (W)
 Tw = Inlet water temperature (°C)
 Tw = Inside enclosure temperature (°C)

Accessories / Options

Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000777
Level switch, NO	C16000140
Stainless steel versions	
Special paint	

Front Elevation



Side Elevation

