

# BLU45


## AIR-WATER EXCHANGERS

Characteristics	M.U.	TX-BLU45CX0A
Cooling capacity - W10A35	W	4500
Water flow rate	l/h	500
Power supply	V ~ Hz	115 1~ 50-60
Width	mm	398
Height	mm	1148
Depth	mm	163
Max. current	A	1,5
Fuse T	A	4
Absorbed electric power - W10A35	W	170
Duty cycle	-	100%
Electrical connection	-	cable L = 3 m
Refrigerant	-	WATER
Hydraulic circuit max. pressure	bar	5
Air flow rate	m3/h	1500
Internal temperature range	°C	20-60
External temperature range	°C	1-70
Protection level EN60529	-	IP55
Noise level	dB (A)	69
Weight	Kg	30
Colour	-	RAL 7032 ORANGE PEEL EFFECT
Conformity	-	CE

Accessories/Options	
Thermostat 20-46°C, gas bulb 15A	TX-C16000002
Solenoid valve, NC	TX-C15000119
Level switch, NO	TX-C16000140
Stainless steel version	
Special paint on request	




### Performances

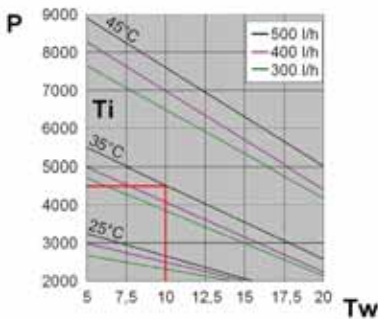

P = Cooling capacity (W)  
Tw = Inlet water temperature (°C)  
Ti = Inside enclosure temperature (°C)

### Dimensions

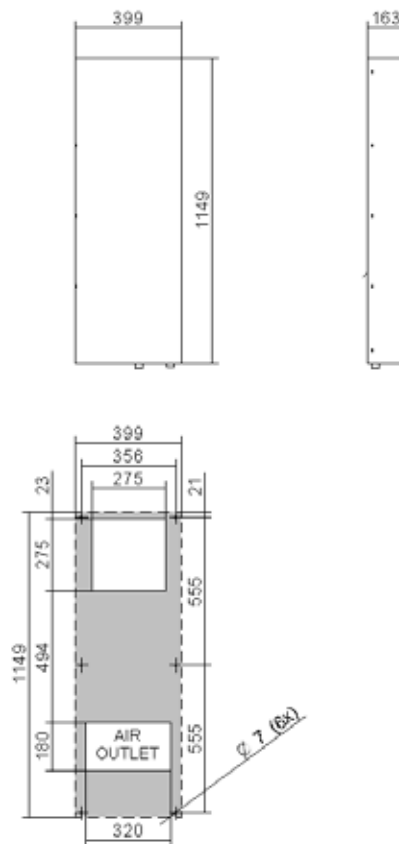

### Drilling template

### Composition of the supply

- Ready-to-install air-water exchanger
- Self-adhesive seal for coupling to the enclosure
- Installation, operating and maintenance manual
- Drilling template in 1:1 scale
- Assembly accessories