




BLU60

Air-Water Heat Exchangers - Door or Wall Mounting

Characteristics	M.U.	TX-BLU60BX0B	TX-BLU60CX0B	TX-BLU60GX0B
Cooling capacity - W10A35	W	6000	6000	6000
Water flow rate	l/h	800	800	800
Power supply	V - Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Height	mm	1500	1500	1500
Width	mm	450	450	450
Depth	mm	163	163	163
Max. current	A	0.71	1.5	0.4
Fuse T	A	2	4	1
Absorbed power - W10A35	W	160	170	170
Duty cycle	-	100%	100%	100%
Electrical connection	-	Cable L=3m	Cable L=3m	Cable L=3m
Refrigerant	-	Water	Water	Water
Hydraulic circuit max. press.	bar	5	5	5
Water connections	-	½"G	½"G	½"G
Air flow rate	m³/h	1450	1450	1450
Internal temperature range	°C	20-60	20-60	20-60
External temperature range	°C	1-70	1-70	1-70
Protection level EN60529	-	IP55	IP55	IP55
Noise level	dB (A)	69	69	69
Weight	kg	40	40	42
Conformity	-	CE	CE	CE
Colour	-	RAL7035 ripple finish		

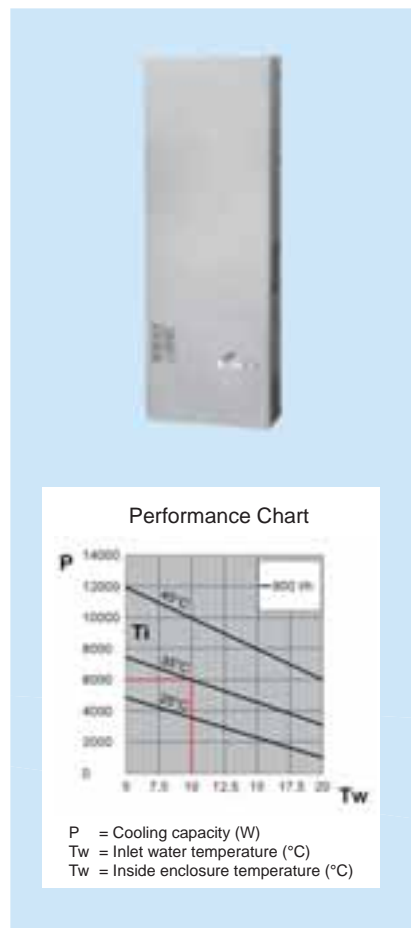

Accessories / Options	
Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000119
Level switch, NO	C16000140
Stainless steel versions	
Special paint	

Front Elevation



Side Elevation

