


# DEK04


## COOLING UNITS FOR ROOF MOUNTING

Characteristics	M.U.	TX-DEK04BM0A
Cooling capacity EN814 - A35A35	W	410
Cooling capacity EN814 - A35A50	W	240
Power supply	V ~ Hz	230 1~ 50-60
Width	mm	259
Height	mm	264
Depth	mm	486
Max. current	A	1,5
Inrush current	A	4
Fuse T	A	4
Absorbed electric power EN814 - A35A35	W	270
Absorbed electric power EN814 - A35A50	W	315
Duty cycle	-	-
Electrical connection	-	terminal board
Refrigerant R134a	Kg	0,16
Cooling circuit max. pressure	bar	26
External air fan	m3/h	330
Enclosure air fan	m3/h	235
Internal temperature range	°C	20-46
Temperature setting	-	internal thermostat factory set at 35 °C
External temperature range	°C	20-55*
Protection level EN60529 - enclosure side	-	IP54
Protection level EN60529 - ambient side	-	IP34
Noise level	dB (A)	60
Weight	Kg	0
Colour	-	RAL 7032 ORANGE PEEL EFFECT
Conformity	-	CE

Accessories/Options	
Pack of 5 cloth air filters	TX-C15000171
Pack of 1 metal air filter	TX-C15000172
Electronic thermostat	TX-C16000106
Electronic controller	TX-C16000117
Stainless steel version	
Special paint on request	


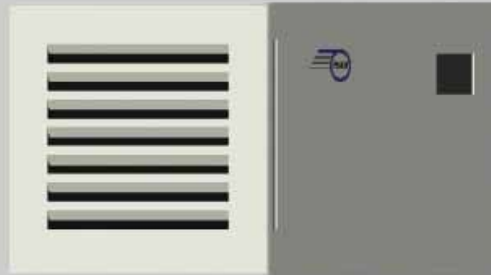


### Performances

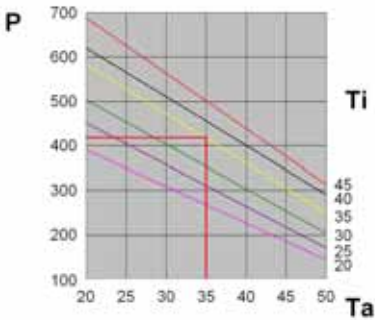

P = Cooling capacity (W)  
Ta = Ambient temperature (°C)  
Ti = Inside enclosure temperature (°C)

### Dimensions

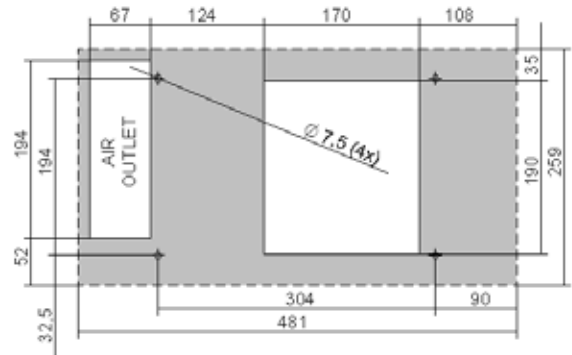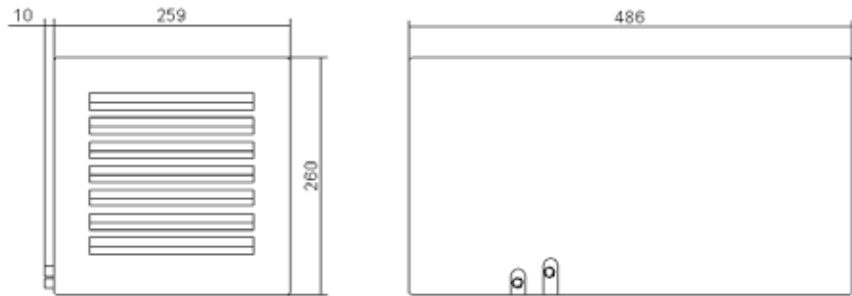

### Drilling template

### Composition of the supply

- Ready-to-install cooling unit
- Self-adhesive seal for coupling to the enclosure
- Installation, operating and maintenance manual
- Drilling template in 1:1 scale
- Assembly accessories