


# DEK08

## COOLING UNITS FOR ROOF MOUNTING


Characteristics	M.U.	TX-DEK08BM0A
Cooling capacity EN814 - A35A35	W	820
Cooling capacity EN814 - A35A50	W	680
Power supply	V ~ Hz	230 1~ 50-60
Width	mm	305
Height	mm	310
Depth	mm	607
Max. current	A	2,5
Inrush current	A	9
Fuse T	A	6
Absorbed electric power EN814 - A35A35	W	440
Absorbed electric power EN814 - A35A50	W	490
Duty cycle	-	100%
Electrical connection	-	terminal board
Refrigerant R134a	Kg	0,35
Cooling circuit max. pressure	bar	25
External air fan	m3/h	910
Enclosure air fan	m3/h	575
Internal temperature range	°C	20-46
Temperature setting	-	internal thermostat factory set at 35 °C
External temperature range	°C	20-55*
Protection level EN60529 - enclosure side	-	IP54
Protection level EN60529 - ambient side	-	IP34
Noise level	dB (A)	62
Weight	Kg	23
Colour	-	RAL 7032 ORANGE PEEL EFFECT
Conformity	-	CE

\*50°C (60Hz)

Accessories/Options	
Pack of 5 cloth air filters	TX-C15000173
Pack of 1 metal air filter	TX-C15000174
Electronic thermostat	TX-C16000106
Electronic controller	TX-C16000117
Stainless steel version	
Special paint on request	


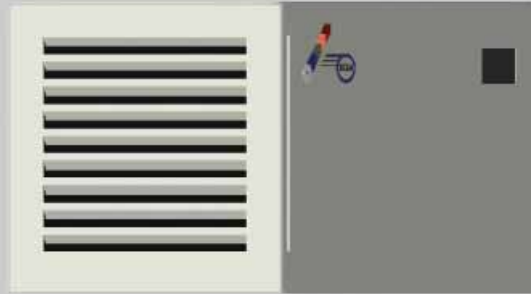


### Performances

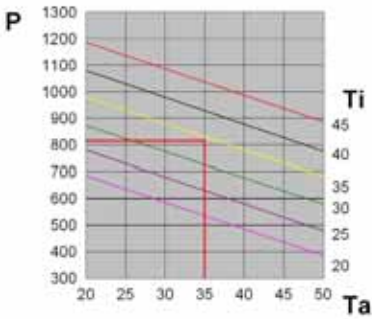

P = Cooling capacity (W)  
Ta = Ambient temperature (°C)  
Ti = Inside enclosure temperature (°C)

### Dimensions

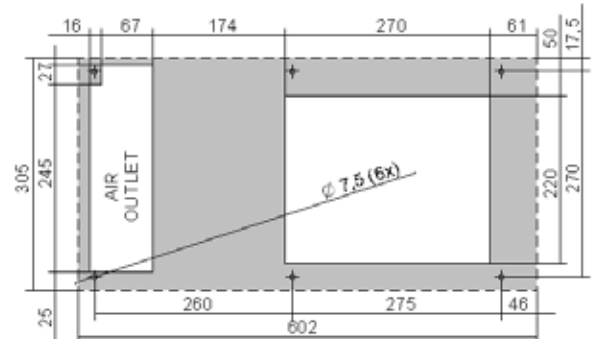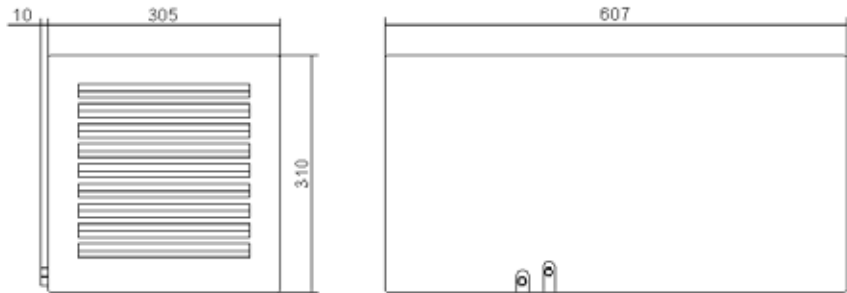

### Drilling template

### Composition of the supply

- Ready-to-install cooling unit
- Self-adhesive seal for coupling to the enclosure
- Installation, operating and maintenance manual
- Drilling template in 1:1 scale
- Assembly accessories