



## EGO06 - TX-EGO06BM1A Cooling Capacity 640W

Characteristics	M.U.	TX-EGO06BM1A
Cooling capacity EN814 - A35A35	W	640
Cooling capacity EN814 - A35A50	W	470
Power supply	V-Hz	230 1-50-60
Height	mm	606
Width	mm	316
Depth	mm	212
Max. Current	A	2.1
Inrush current	A	8.1
Fuse T	A	6
Absorbed electric power EN814 - A35A35	W	400
Absorbed electric power EN814 - A35A50	W	470
Duty cycle	-	100%
Electrical connection	-	Terminal board
Refrigerant R134a	kg	0.2
Cooling circuit max. pressure	bar	25
External fan air flow	m <sup>3</sup> /h	570
Enclosure fan air flow	m <sup>3</sup> /h	330
Internal temperature range	°C	20-46
Temperature setting	-	Internal thermostat factory set at 35°C
External temperature range	°C	20-55*
Protection level EN60529 - enclosure side	-	IP54
Protection level EN60529 - ambient side	-	IP34
Noise level	dB (A)	65
Weight	kg	21
Conformity	-	CE
Colour	-	RAL 7032 ripple

\* 50°C at 60 Hz


\*\* Depth increases due to the external mounting of the autotransformer

### Accessories / Options

Pack of 5 cloth air filters	TX-AAEFO06
Pack of 1 metal air filter	TX-AAEFM06
Electronic thermostat	TX-C16000106
Electronic controller	TX-C16000117




Performance Chart

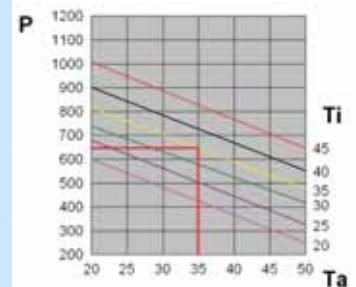

P = Cooling capacity (W)  
Ta = Ambient temperature (°C)  
Ti = Inside enclosure temperature (°C)


Front Elevation

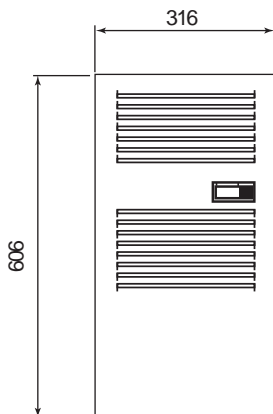

Side Elevation



Drilling Template\*

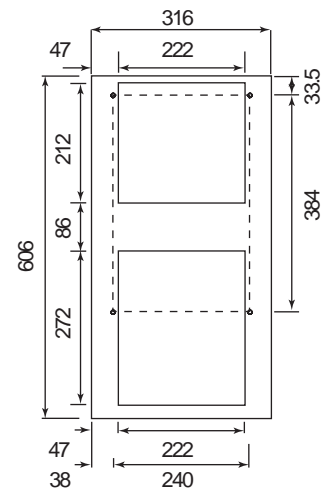

\* Drilling template dimensions may change without notice, please refer to your sales representative for further details.

Queensland, Head Office Brisbane South Industrial Park 51 Stradbroke St., Heathwood, QLD 4110  
PO Box 1151, Browns Plains BC, QLD 4118

Ph: (07) 3714 1000 Fax: (07) 3714 1081 ISD +61 7 3714 1000

Certified to AS/NZS ISO 9001 - AS/NZS 4801