

MIX14


AIR-AIR HEAT EXCHANGERS

Characteristics	M.U.	TX-MIX14CX0A
Specific cooling power	W/K	14
Power supply	V ~ Hz	115 1~ 50-60
Width	mm	188
Height	mm	363
Depth	mm	165
Max. current	A	0,96
Fuse T	A	2
Absorbed electric power	W	80
Duty cycle	-	100%
External air fan	m3/h	280
Enclosure air fan	m3/h	280
Temperature limits	°C	-5 +55
Protection level EN60529 - enclosure side	-	IP54
Noise level	dB (A)	60
Weight	Kg	7
Colour	-	RAL 7032 ORANGE PEEL EFFECT
Conformity	-	CE





Accessories/Options	
0-60°C thermostat, NO 10A	TX-AAFTO12
5-60°C thermostat, change-over contactor 10A	TX-AAWTS10
Stainless steel version	
Special paint on request	



Performances

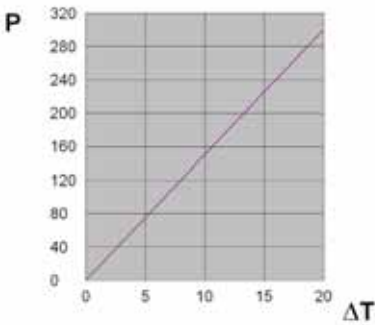

Dimensions

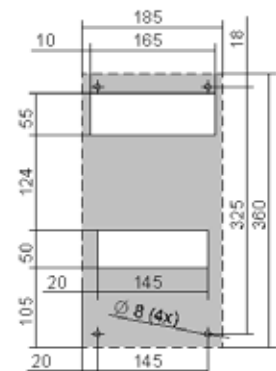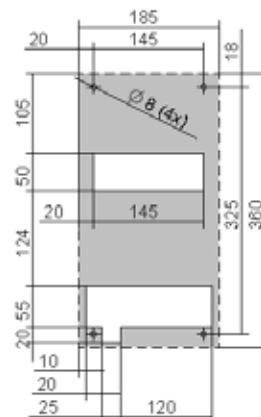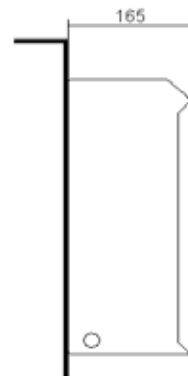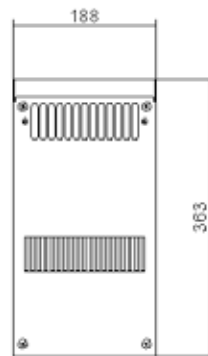

Drilling templates

External assembly

Internal assembly

Composition of the supply

- Exchanger featuring baffle, both inside and outside, ready to install
- Installation, operating and maintenance manual
- Drilling template in 1:1 scale
- Fan connecting cables
- Assembly accessories