



MIX50

Air-Air Heat Exchangers


Characteristics	M.U.	TX-MIX50BX0X	TX-MIX50CX0B
Specific cooling power	W/K	50	50
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Height	mm	771	771
Width	mm	316	316
Depth	mm	93	93
Max. current	A	0.64	1.12
Fuse T	A	1	2
Absorbed power	W	140	150
Duty cycle	-	100%	100%
External fan air flow	m ³ /h	600	600
Enclosure fan air flow	m ³ /h	600	600
Temperature limits	°C	-5 +55	-5 +55
Protection level EN60529 - enclosure side	-	IP54	IP54
Noise level	dB (A)	67	67
Weight	kg	10	10
Conformity	-	CE	CE
Colour	-	RAL7035 ripple finish	



Accessories / Options


0-60°C thermostat, NO 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Stainless steel	
Special paint on request	

Performance Chart



P = Cooling Power (W)
 Q = Differential Temp. ($T_n - T_{ex}$) (K)

Drilling Template*

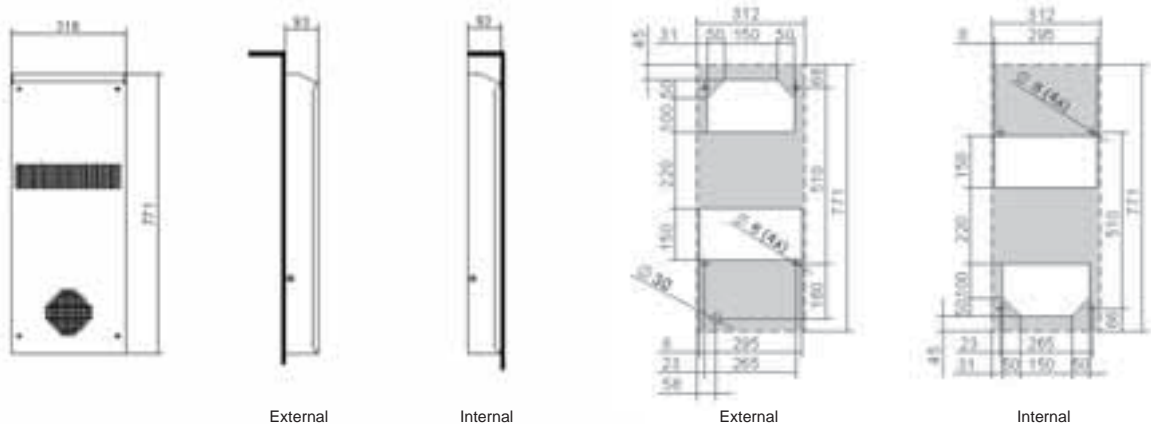

* Drilling template dimensions may change without notice, please refer to your sales representative for further details.

Queensland, Head Office Brisbane South Industrial Park 51 Stradbroke St., Heathwood, QLD 4110

PO Box 1151, Browns Plains BC, QLD 4118

Ph: (07) 3714 1000 Fax: (07) 3714 1081 ISD +61 7 3714 1000

Certified to AS/NZS ISO 9001 - AS/NZS 4801