





WID05-15ZX0P

Anti-condensation Heaters with Protected Surface

Characteristics	M.U.	TX-WID05ZX0P	TX-WID10ZX0P	TX-WID15ZX0P
Heating capacity*	W	50	100	150
Power supply	V ~ Hz	110-250V AC/DC	110-250V AC/DC	110-250V AC/DC
Height	mm	110	110	150
Width	mm	60	60	60
Depth	mm	90	90	90
Max. current	A	2.5	4.5	8
Heating element	-	PTC self-regulated	PTC self-regulated	PTC self-regulated
Electrical connection	-	4-pole terminal board	4-pole terminal board	4-pole terminal board
Protection class IEC	-	II	II	II
Protection level EN60529	-	IP20	IP20	IP20
Casing	-	Plastic UL94 V-0	Plastic UL94 V-0	Plastic UL94 V-0
Mounting on clip for DIN bar	mm	35	35	35
Weight	kg	0.3	0.3	0.3
Conformity	-	CE	CE	CE

Accessories / Options

0-60°C thermostat, NO 10A	AAWTC10
5-60°C thermostat, change-over contact 10A	AAWTS10
RH 35-95% humidistat, 5A change-over contact	AAWHS10

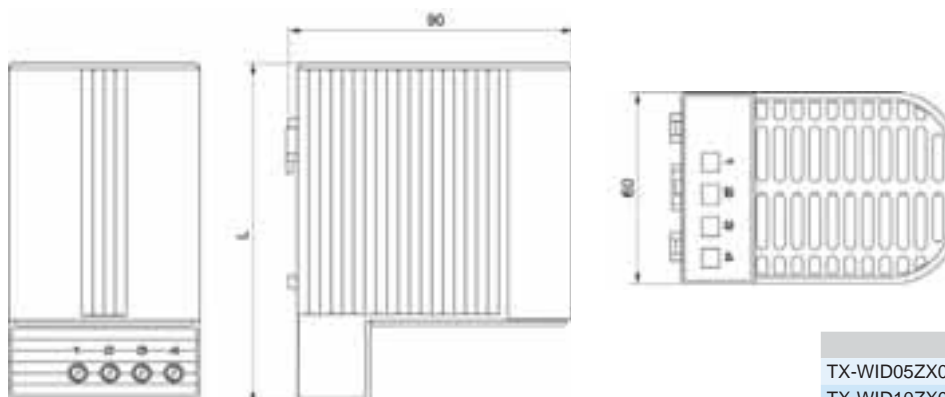

	L, mm
TX-WID05ZX0P	110
TX-WID10ZX0P	110
TX-WID15ZX0P	150

Queensland, Head Office Brisbane South Industrial Park 51 Stradbroke St., Heathwood, QLD 4110

PO Box 1151, Browns Plains BC, QLD 4118

Ph: (07) 3714 1000 Fax: (07) 3714 1081 ISD +61 7 3714 1000

Certified to AS/NZS ISO 9001 - AS/NZS 4801