


WID10

ANTICONDENSATION HEATERS

Characteristics	M.U.	TX-WID10ZX0X
Heating capacity*	W	100
Power supply	V ~ Hz	110 - 250 V AC/DC
Dimensions HxWxD	mm	182x70x50
Max. current	A	2,4
Heating element	-	PTC self regulated
Electrical connection	-	3-pole terminal board
Protection class IEC	-	-
Protection level EN60529	-	IP20
Radiator	-	die-cast aluminium
Mounting on clip for DIN bar	mm	35
Weight	Kg	0,5
Conformity	-	CE

Accessories/Options	
0-60°C thermostat, NC 10A	TX-AAWTC10
10-60°C thermostat, 10A change-over contactor	TX-AAWTS10
RH 35-95% humidistat, 5A change-over contactor	TX-AAWHS10

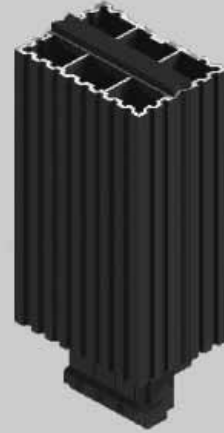

Easy assembly thanks to quick fitting terminals

Composition of the supply

- Ready-to-install heater
- Instructions for installation and use
- DIN bar fixing accessories

Dimensions

