


WID55 FANNED ANTICONDENSATION HEATERS WITH THERMOSTAT

Characteristics	M.U.	TX-WID55BL0T
Heating capacity*	W	550
Power supply	V ~ Hz	230 1~ 50-60
Max. current	A	8,5
Dimensions HxWxD	mm	165x100x132
Heating element	-	PTC self regulated
Fan capacity	m3/h	45
Support	-	bearings
Life at 25°C	m3/h	50000
Electrical protection	-	for a failure on the fan
Temperature limits	°C	0-60
Electrical connection	-	2-pole terminal board
Protection class IEC	-	II
Protection level EN60529	-	IP20
Mounting on clip for DIN bar	mm	35
Weight	Kg	1,1
Conformity	-	CE


Accessories/Options	
10-60°C thermostat, 10A change-over contactor	TX-AAWTS10
RH 35-95% humidistat, 5A change-over contactor	TX-AAWHS10

Performances

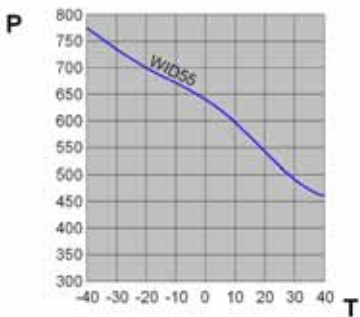

P = Heating capacity (W)
T = Temperature (°C)

Dimensions

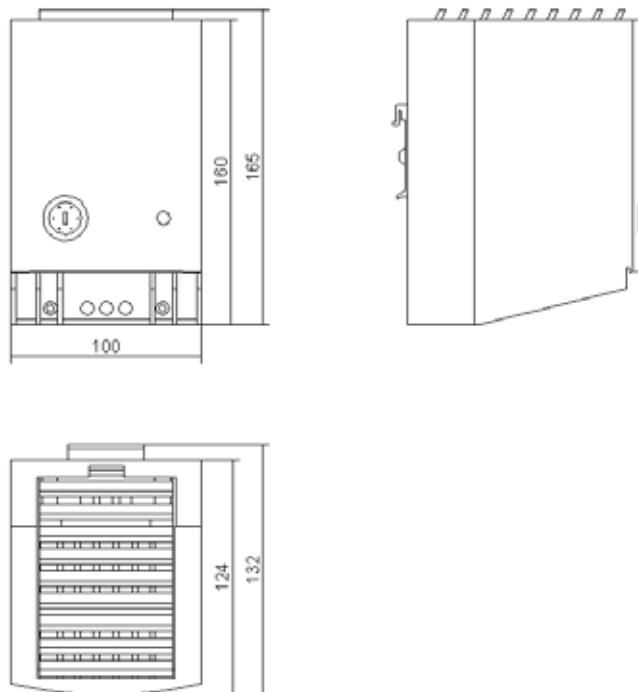

Composition of the supply

- Ready-to-install heater
- Instructions for installation and use
- DIN bar fixing accessories