

AUSRACK PLUS
RAIL ADJUSTMENT

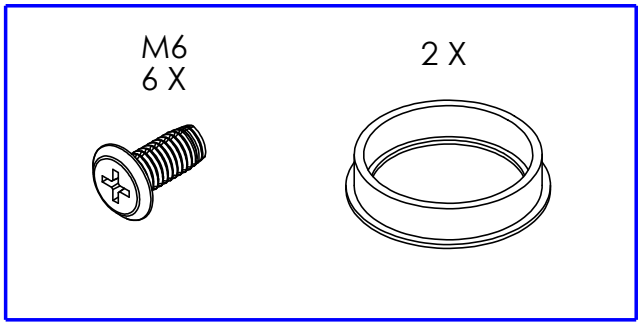

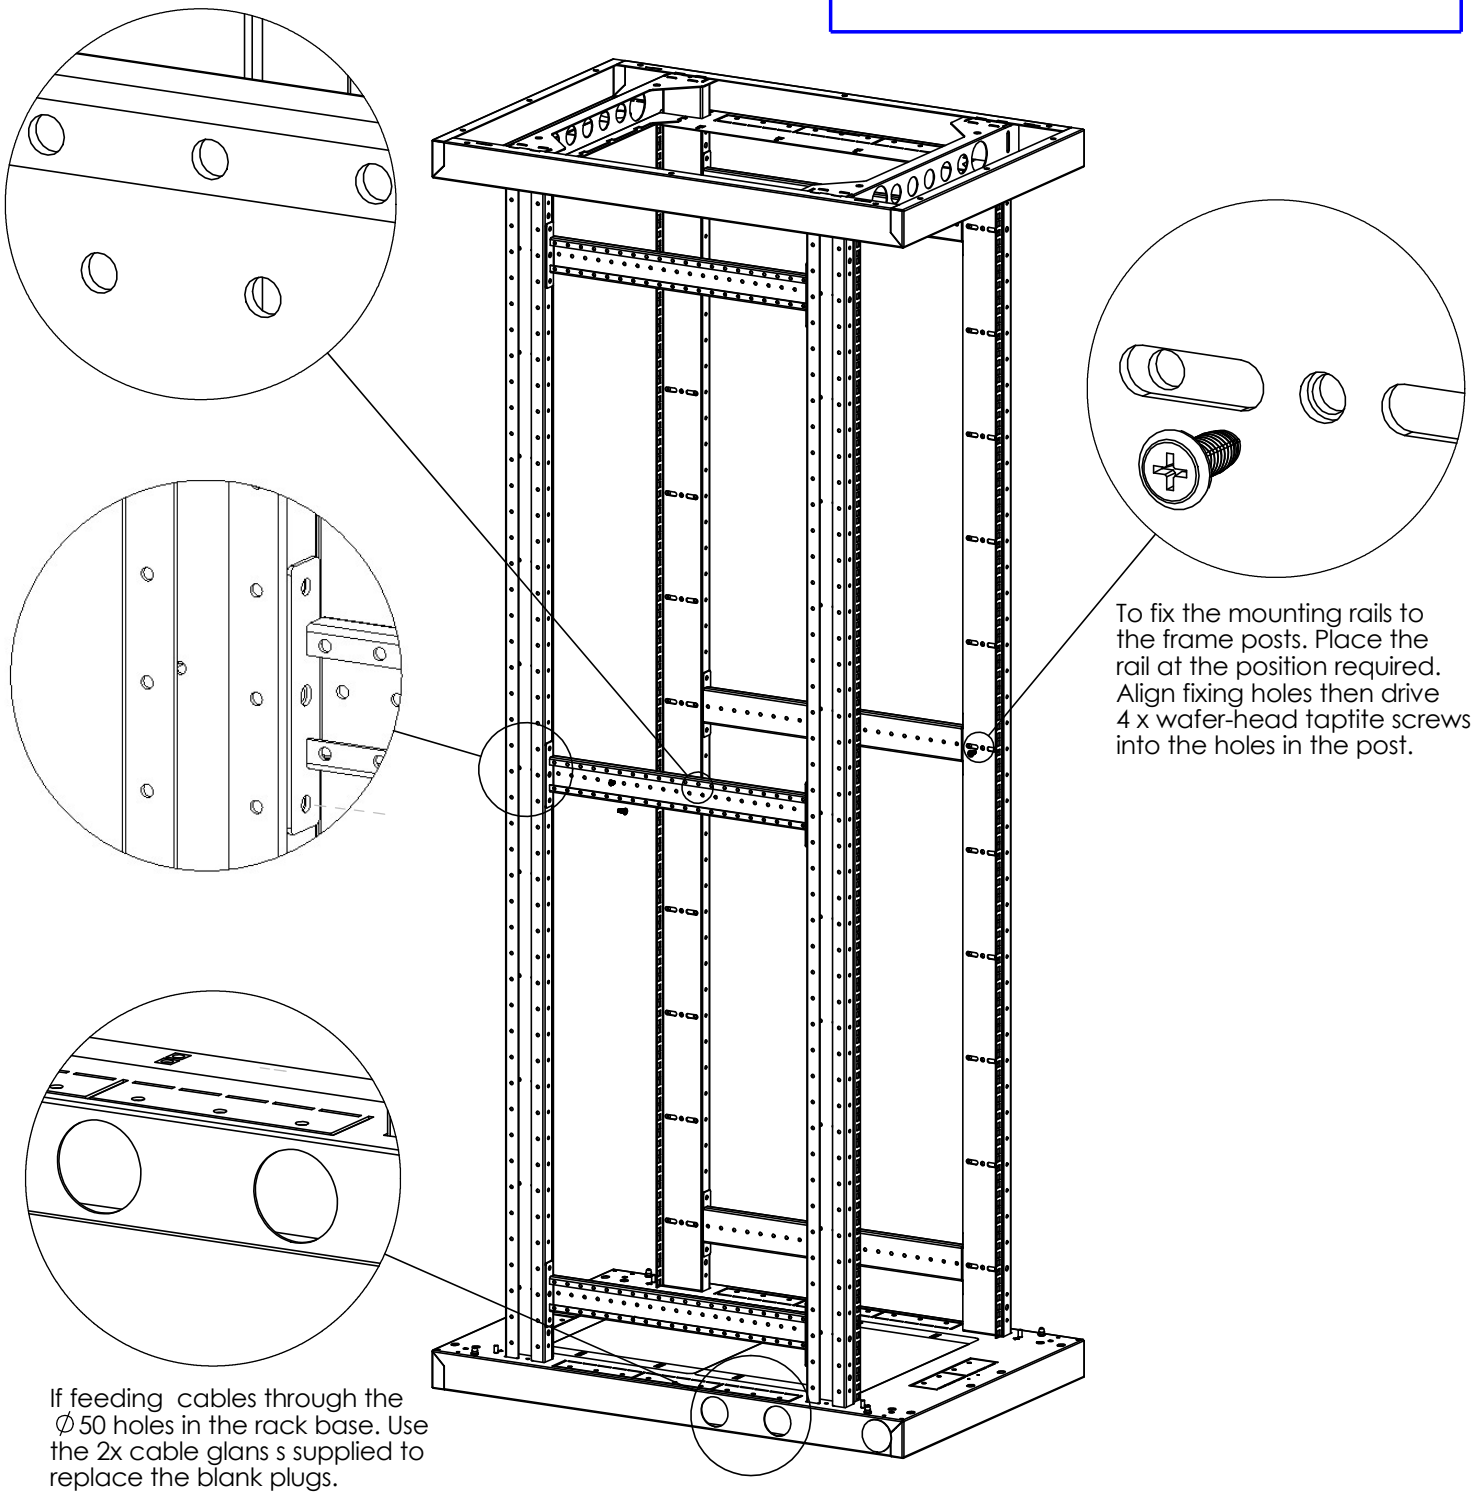

To fix the mounting rails to the frame posts. Place the rail at the position required. Align fixing holes then drive 4 x wafer-head taptite screws into the holes in the post.

If feeding cables through the ∅50 holes in the rack base. Use the 2x cable glans s supplied to replace the blank plugs.

At the time of publication all information was correct. We reserve the right, without prior notification, to modify or improve design or specification as necessary.

© B&R Enclosures Pty Ltd. 2003