




- Designed for multiple tenancy sites in residential and commercial metering applications.
- For use in all states except Victoria, Tasmania and Western Australia.
- Ample DIN space.
- Padlockable handle available as an accessory.
- Lift-off door for easy installation.
- Sales in NSW Supply Authority regions require GMEPLK locking handle.
- Manufactured from 1.0mm galvanised steel to Z275.
- Powdercoated Light Grey RAL7035.

Comes standard with:

- Key lockable door handle
- Black panel

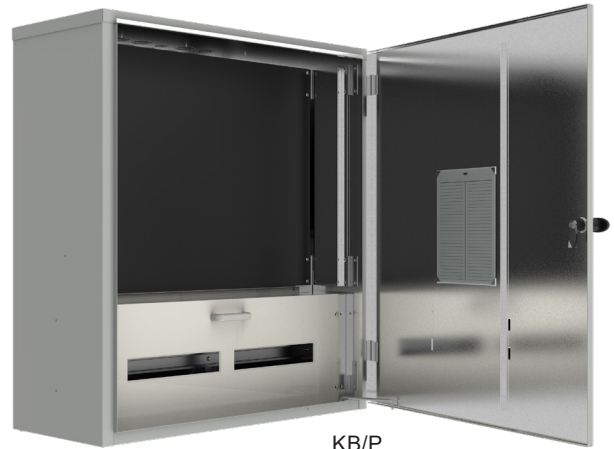

KB/P

ORDERING GUIDE

Part Number	Description	DIN space	Dimensions (mm)			Panel (mm)			No. of panels	Doors
			Height	Width	Depth	Height	Width	Depth Behind		
JB/P	Painted With DIN	24-pole	900	600	343	560	550	150	1	
KB/P		30-pole	900	800	343	560	750	150	1	
LB/P		30-pole	1200	800	420	863	750	220	1	
MB/P		36-pole	1200	1000	435	863	950	230	1	Double doors
NB/P▲*		30-pole	900	1600	435	560 822	750 750	230	2	Double doors
OB/P▲*		30-pole	1200	1600	435	1124 863	750 750	230	2	Double doors
JB/PU	Unpainted With DIN	24-pole	900	600	343	560	550	150	1	
KB/PU		30-pole	900	800	343	560	750	150	1	
LB/PU		30-pole	1200	800	435	863	750	220	1	
MB/PU		36-pole	1200	1000	435	863	950	230	1	Double doors
NB/PU▲*		30-pole	900	1600	435	560 822	750 750	230	2	Double doors
OB/PU▲*		30-pole	1200	1600	435	1124 863	750 750	230	2	Double doors
JB	Painted No DIN	No Din	900	600	343	825	550	150	1	
KB▲		No Din	900	800	343	825	750	150	1	
JB/U	Unpainted No DIN	No Din	900	600	343	825	550	150	1	
KB/U		No Din	900	800	343	825	750	150	1	
LB/U		No Din	1200	800	420	1124	750	220	1	
MB/U		No Din	1200	1000	420	1124	950	230	1	Double doors

* Two panels supplied with product
▲ Available on request.

ACCESSORIES

Part Number	Product	JB/P	KB/P	LB/P	NB/P	JB/PU	KB/PU	LB/PU	NB/PU	OB/PU	JB	KB	JB/U	KB/U	LB/U	MB/U
GMEPLK	Padlockable handle	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
JB/PLINTH	Plinths 500mm height	•				•					•		•			
KB/PLINTH				•				•							•	