


Horizon S Series

Residential metering enclosures for SA applications



- Designed for both single and multi-phase installations.
- AS/NZS 3012 compliant for construction sites as standard.
- Region D wind rated to AS1170.2-2002: Structural design actions – Wind actions.
- Provides safety, quality and performance.
- Suitable for domestic and light commercial metering applications.
- Self-closing gravity catch.
- Top cable entry has ratchet aperture shut-off slide.
- RotaDIN® rotating / removable DIN section.
- Cord retainer for easy retention of extension cords.
- Circuit identification label area with protective cover.
- Weatherproof installation label for AS/NZS3000 compliance.
- Padlockable facility.
- External frame mounting brackets
- To suit type 1 and type 2 meter panel.
- Manufactured from 1.0 galvanised steel or 316 stainless steel.
- Powdercoated Light Grey RAL7035 or N4 surface finish.

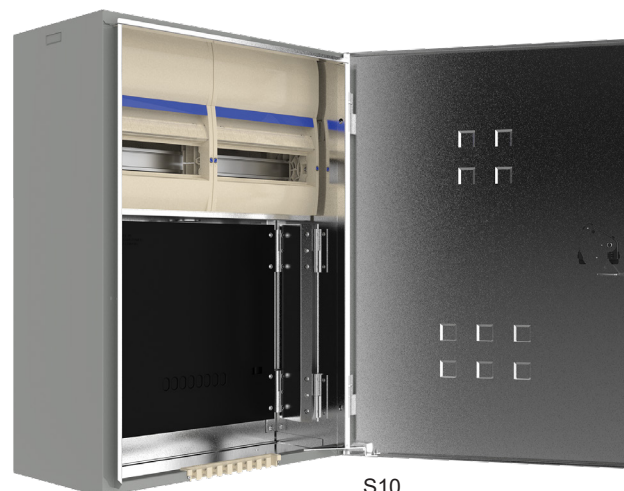

S10

ORDERING GUIDE

Part Number	DIN space	Inclusions			Dimensions (mm)			Panel (mm)		
		MCB	Lock off	Meter Neutral Link	Height	Width	Depth	Height	Width	Depth Behind
S10	24-pole	63A	•	•	690	485	278	350	365	75
S10/S	24-pole	63A	•	•	690	485	278	350	365	75
S20	24-pole	63A	•	•	860	485	278	590	365	75

ORDERING GUIDE – COMBINED SERVICES

Part Number	DIN space	Enclosures		Inclusions		Dimensions (mm)			Panel (mm)			
		S10 HZN/COM1^		Meter Isolator	Panel	Metal pan	Height	Width	Depth	Height	Width	Depth Behind
S82*	24-pole	•	•	•	Type 1	•	1120	485	278	350	365	75

* Electrical and Communications.

^ For more information on the S10 enclosures see table above. For more information on the HZN/COM1 enclosures see page 11.


Horizon S Series

Residential metering enclosures for SA applications

ACCESSORIES

Part Number	Product	Description	S10	S10/S	S20	S82
HZN/PLINTH	Plinth - Galvanized Steel RAL7035	Designed to mate under a standard meter box. Plinth dimension: 690Hx485Wx240D	•		•	
HZN/PLINTH/S▲	Plinth - Stainless Steel	Compliant to region C wind load according to AS/ NZS1170.2		•		
HZN/ROOF	Roof - Galvanized Steel RAL7035	For use in exposed weather applications	•		•	
HZN/ROOF/S▲	Roof - Stainless Steel			•		
CL	Lock	Coin lock (supplied with 2 keys, SAPN master key "series 97000")	•	•	•	•
HZN/FK8	Flush kit	For flush mounting	•			
S20/3TKIT	Conversion Kit	Converts the S20 up to 3 tenancies			•	

▲ Available on request.

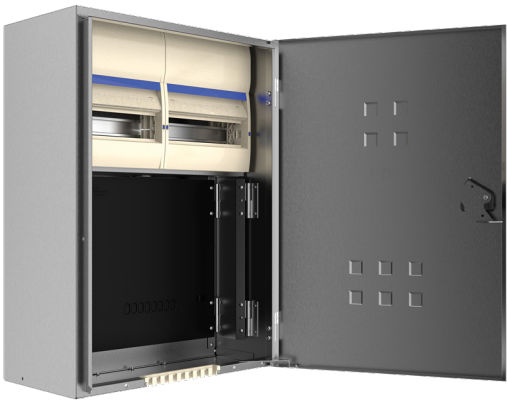


S10/S



S20



HZN/PLINTH

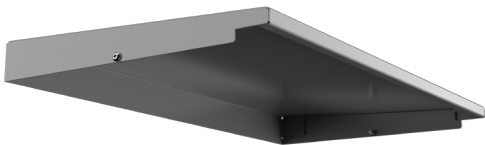

HZN/ROOF