


Horizon T Series
Residential metering enclosures for TAS applications



- Designed for single or multi-phase direct connect metering installations.
- Complies and exceeds both TAS and Australian Supply Authority requirements.
- Region D wind rated to AS1170.2-2002: Structural design actions – Wind actions.
- Designed with robust and durable quality while providing safety and performance.
- Suitable for residential and light commercial metering applications.
- The RotaDIN® removable DIN rail allows for easy installation.
- Ratchet sliding cable entry shut-off to Wiring Rule requirements.
- AS/NZS 3012 compliant with built-in cord retainer.
- Identification and covered labelling sections.
- Padlock facilities.
- Manufactured from 1.0mm galvanised steel to Z275 or 316 stainless steel.

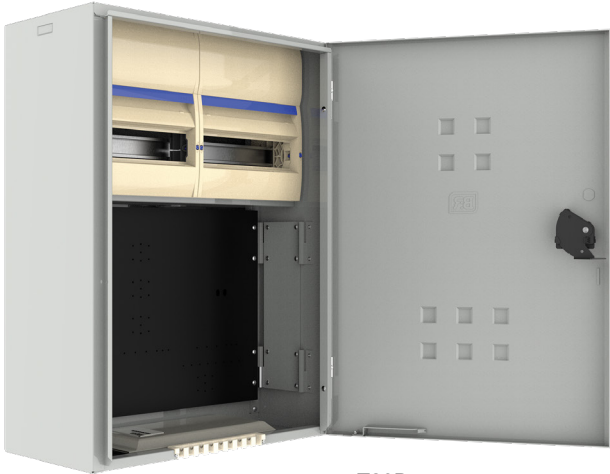

T20B

ORDERING GUIDE

Part Number	DIN Space	Dimensions (mm)			Panel (mm)			Material & Finish
		Height	Width	Depth	Height	Width	Depth Behind	
T20B	24-pole	688	485	278	350	365	75	Galvanised Steel RAL7035
T20B/S▲	24-pole	688	485	278	350	365	75	Stainless Steel N4 Finish
T22	36-pole	860	485	278	380	400	75	Galvanised Steel RAL7035
T9/PKIT	4.5-pole	-	-	-	300	350	-	-

▲ Available on request.

ACCESSORIES

Part Number	Product	Description	T20B	T20B/S	T22
HZN/FK8	Flush Kit	Flush mounting kit	•	•	
CLV001	Lock	Coin lock	•	•	•
HZN/ROOF	Roof - Galvanised Steel RAL7035	Rainhood for weather protection	•		•
HZN/ROOF/S▲	Roof - Stainless Steel			•	
HZN/PLINTH	Plinth - Galvanised Steel RAL7035	Designed to mate under a standard meter box. Plinth dimension: 690Hx485Wx240D Compliant to region C wind load according to AS/NZS1170.2	•		•
HZN/PLINTH/S▲	Plinth - Stainless Steel			•	

▲ Available on request.

Horizon T25P

Residential metering enclosures for TAS applications



- Suitable for domestic and light commercial metering applications.
- Designed as a main switchboard with:
 - Authority compliant panel for dual NMI multi-phase installations.
 - MEN Earth and Neutral bars provided.
 - Sealable authority supply capacity control zones and
 - Consumer zone to feed individual sub-mains
- AS/NZS 3012 compliant for construction sites as standard.
- Cord retainer for easy retention of extension cords.
- Ability to be mounted into property boundary fences.
- Provides for both top and bottom cable entry.
- Provides safety, quality and performance.
- Dual CL001 keylocks for added security including standard self-closing gravity catch.
- Top cable entry has ratchet aperture shut-off slide.
- Circuit identification label area with protective cover.
- Weatherproof installation label for AS/NZS3000 compliance.
- Region D wind rated to AS1170.2-2002: Structural design actions – Wind actions.
- Manufactured from galvanised steel
- Powdercoated Light Grey RAL7035.



T25P

ORDERING GUIDE


Part Number	DIN Space	Dimensions (mm)			Panel (mm)		
		Height	Width	Depth	Height	Width	Depth Behind
T25P	9 + 12-pole	860	485	278	590	365	75

ACCESSORIES

Part Number	Product	Description
HZN/FK8	Flush Kit	Flush mounting kit
HZN/ROOF	Roof - Galvanised Steel RAL7035	Rainhood for weather protection
HZN/PLINTH	Plinth - Galvanised Steel RAL7035	Designed to mate under a standard meter box. Plinth dimension: 690Hx485Wx240D Compliant to region C wind load according to AS/NZS1170.2



HZN/PLINTH

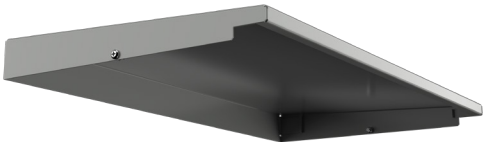

HZN/ROOF