


# Horizon V Series

Residential metering enclosures for VIC applications



- VSIR Approval #SIR140615B
- Designed for both single and multi-phase installations.
- AS/NZS 3012 compliant for construction sites as standard.
- Region D wind rated to AS1170.2-2002: Structural design actions – Wind actions.
- Suitable for domestic and light commercial metering applications.
- Self-closing gravity catch.
- Top cable entry has ratchet aperture shut-off slide.
- RotaDIN® rotating / removable DIN section.
- Cord retainer for easy retention of extension cords.
- Circuit identification label area with protective cover.
- Weatherproof installation label for AS/NZS3000 compliance.
- Padlockable facility.
- External frame mounting brackets.
- Manufactured from 1.0 galvanised steel or 316 stainless steel.
- Powdercoated Light Grey RAL7035 or N4 surface finish.

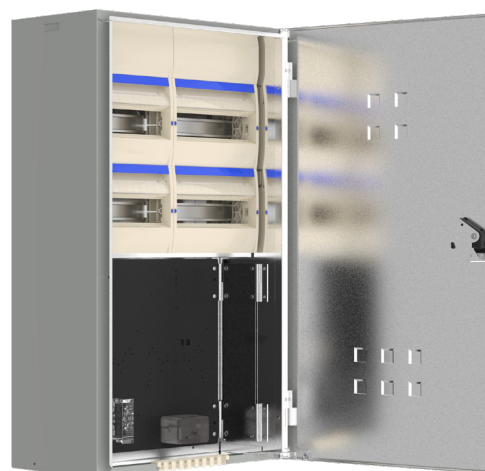

V12

## ORDERING GUIDE

| Part Number     | DIN space | Inclusions      |              | Dimensions (mm) |       |       | Panel (mm) |       |              |
|-----------------|-----------|-----------------|--------------|-----------------|-------|-------|------------|-------|--------------|
|                 |           | Neutral link    | Service fuse | Height          | Width | Depth | Height     | Width | Depth Behind |
| V5 <sup>^</sup> | 20-pole   | •               | •            | 430             | 485   | 277   | 380        | 400   | 75           |
| V10             | 24-pole   | N18P + stud     | •            | 690             | 485   | 278   | 380        | 400   | 75           |
| V10/S           | 24-pole   | N18P + stud     | •            | 690             | 485   | 278   | 380        | 400   | 75           |
| V11*            |           |                 |              | 430             | 485   | 278   | 380        | 400   | 75           |
| V11/2*          |           |                 | •            | 430             | 485   | 278   | 380        | 400   | 75           |
| V12             | 48-pole   | 2 x N18P + stud | •            | 860             | 485   | 278   | 380        | 400   | 75           |

\* For remote load centre applications

<sup>^</sup> Single phase meters only

## ACCESSORIES

| Part Number               | Product                              | Description                                                                                                                                | V5 | V10 | V10/S | V11 | V11/2 | V12 |
|---------------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|----|-----|-------|-----|-------|-----|
| U/GBP                     | Builder's pole                       | Underground                                                                                                                                | •  | •   | •     |     |       | •   |
| U/GBPS                    | Pole support                         | Temporary, head only                                                                                                                       | •  | •   | •     | •   | •     | •   |
| HZN/FK8                   | Flush kit                            | For flush mounting                                                                                                                         |    | •   | •     |     |       |     |
| CLV001                    | Lock                                 | Coin lock                                                                                                                                  | •  | •   | •     | •   | •     | •   |
| HZN/ROOF                  | Roof - Galvanised Steel<br>RAL7035   | For use in exposed weather applications                                                                                                    | •  | •   |       | •   | •     | •   |
| HZN/ROOF/S <sup>▲</sup>   | Roof - Stainless Steel               |                                                                                                                                            |    |     | •     |     |       |     |
| HZN/PLINTH                | Plinth - Galvanised Steel<br>RAL7035 | Designed to mate under a standard meter box. Plinth dimension: 690Hx485Wx240D<br>Compliant to region C wind load according to AS/NZS1170.2 |    | •   |       | •   | •     | •   |
| HZN/PLINTH/S <sup>▲</sup> | Plinth - Stainless Steel             |                                                                                                                                            |    |     | •     |     |       |     |

<sup>▲</sup> Available on request.

Horizon V Series

Residential metering enclosures for VIC applications


ACCESSORIES

| Part Number   | Product                              | Description                                                                                                                                | V5 | V10 | V10/S | V11 | V11/2 | V12 |
|---------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|----|-----|-------|-----|-------|-----|
| U/GBP         | Builder's pole                       | Underground                                                                                                                                | •  | •   | •     |     |       | •   |
| U/GBPS        | Pole support                         | Temporary, head only                                                                                                                       | •  | •   | •     | •   | •     | •   |
| HZN/FK8       | Flush kit                            | For flush mounting                                                                                                                         |    | •   | •     |     |       |     |
| CLV001        | Lock                                 | Coin lock                                                                                                                                  | •  | •   | •     | •   | •     | •   |
| HZN/ROOF      | Roof - Galvanised Steel<br>RAL7035   | For use in exposed weather applications                                                                                                    | •  | •   |       | •   | •     | •   |
| HZN/ROOF/S▲   | Roof - Stainless Steel               |                                                                                                                                            |    |     | •     |     |       |     |
| HZN/PLINTH    | Plinth - Galvanised Steel<br>RAL7035 | Designed to mate under a standard meter box. Plinth dimension: 690Hx485Wx240D<br>Compliant to region C wind load according to AS/NZS1170.2 |    | •   |       | •   | •     | •   |
| HZN/PLINTH/S▲ | Plinth - Stainless Steel             |                                                                                                                                            |    |     | •     |     |       |     |

▲ Available on request.



U/GBP

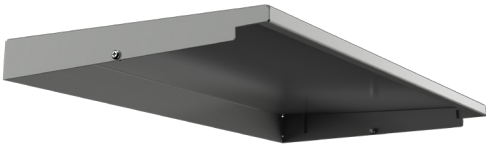

HZN/ROOF



HZN/PLINTH