



- Designed for rugged industrial applications including local control stations, mini control consoles or motor isolators.
- Suitable for mine sites and sugar mills.
- 30° sloping roof and 20mm overhang to prevent build up of solids.
- Specially designed gutter system.
- Conformity, Approvals:
Lloyds Register #06/10007 (E2)
- Region D wind rated to AS1170.2-2002:
Structural design actions - Wind actions
- Manufactured from 1.5mm 316 stainless steel.
- N4 surface finish or powdercoated X15 orange.

Comes standard with:

- 2mm steel mounting pan powdercoated white
- Stainless steel gland plate
- Mounting flanges top & bottom
- Stainless steel lock with 7mm square stainless steel insert (NI020/S)
- Door rails
- Earth strap kit



ORDERING GUIDE

Part Number		Dimensions (mm)												Weight (kg)	No. of Locks
		External				Internal	Mounting Pan		Gland Opening		Mounting Centres				
Standard	X15 Orange	Height (A)	Width (B)	Depth (C)	Total Height (D)**	Usable Depth*(E)	Height (F)	Width (G)	Width (H)	Depth (I)	Height (J)	Width (K)			
SR03021/S	SR03021/SRO [▲]	300	200	150	507	140	250	150	175	70	477	100	5.5	1	
SR04031/S	SR04031/SRO [▲]	400	300	150	607	140	350	250	175	70	577	200	9	1	
SR03042/S◇	SR03042/SRO [▲]	300	400	200	536	190	250	350	250	120	506	300	10	1	
SR04042/S◇	SR04042/SRO [▲]	400	400	200	636	190	350	350	250	120	606	300	13	1	
SR06042/S◇	SR06042/SRO [▲]	600	400	200	836	190	550	350	250	120	806	300	17	1	
SR04062/S◇	SR04062/SRO [▲]	400	600	200	636	190	350	550	440	120	606	500	18	1	
SR08062/S◇	SR08062/SRO [▲]	800	600	200	1036	190	750	550	440	120	1006	500	31	2	
SR10062/S◇	SR10062/SRO [▲]	1000	600	200	1236	190	950	550	440	120	1206	500	37	2	
SR04063/S◇	SR04063/SRO [▲]	400	600	300	694	290	350	550	440	120	663	500	21	1	
SR06063/S◇	SR06063/SRO [▲]	600	600	300	894	290	550	550	440	120	863	500	28	1	
SR08063/S [▲]	SR08063/SRO ^{▲▲}	800	600	300	1094	290	750	550	440	120	1063	500	35	2	

[▲] Available on request

* Mounting pan to inside of door

** Includes from bottom of enclosures to top mounting flange

◇ Includes vertical door rails


▲ Includes horizontal and vertical door rails

ACCESSORIES

Product	Description	Part Number	Dimensions (mm)			SR03021/S (/SRO)	SR04031/S (/SRO)	SR03042/S (/SRO)	SR04042/S (/SRO)	SR06042/S (/SRO)	SR04062/S (/SRO)	SR08062/S (/SRO)	SR10062/S (/SRO)	SR04063/S (/SRO)	SR06063/S (/SRO)	SR08063/S (/SRO)
			Height	Width	Thickness											
Mounting pan	Insulated	SRIMP032	250	150	6	•										
		SRIMP034	250	350	6		•	•								
		SRIMP044	350	350	6				•							
		SRIMP046 [▲]	350	550	6					•				•		
		SRIMP064	550	350	6				•							
		SRIMP066	550	550	6										•	
		SRIMP086 [▲]	750	550	6						•					•
Gland plate	Brass	SRBGP3/1	195	100	3	•	•									
		SRBGP3/2	290	160	3			•	•	•						
		SRBGP3/3	480	160	3						•	•	•	•	•	•
		SRBGP6/1	195	100	6	•	•									
		SRBGP6/2	290	160	6			•	•	•						
		SRBGP6/3	480	160	6						•	•	•	•	•	•
	316 stainless steel	SRS GP/1	195	100	1.5	•	•									
		SRS GP/2 [▲]	290	160	1.5			•	•	•						
		SRS GP/3 [▲]	480	160	1.5						•	•	•	•	•	•
	Aluminium	SRAGP6/1	195	100	6	•	•									
		SRAGP6/2	290	160	6			•	•	•						
		SRAGP6/3	480	160	6						•	•	•	•	•	•
External vent kit	316 stainless steel	IPVK/S	130	130	—	•	•	•	•	•	•	•	•	•	•	•
		IPVK/SRO [▲]	130	130	—	•	•	•	•	•	•	•	•	•	•	•
		IPVK16/S [▲]	260	260	—	▲	▲	▲	▲	▲	▲	▲	▲	•	•	•
		IPVK16/SRO [▲]	260	260	—	▲	▲	▲	▲	▲	▲	▲	▲	•	•	•
Replacement hinge	Kit	NI/H	—	—	—	•	•	•	•	•	•	•	•	•	•	•
Touch up paint (150g)	X15 Orange	TUP/P24	—	—	—	•	•	•	•	•	•	•	•	•	•	•

▲ Fits door only
▲ Available on request

TECHNICAL DRAWING

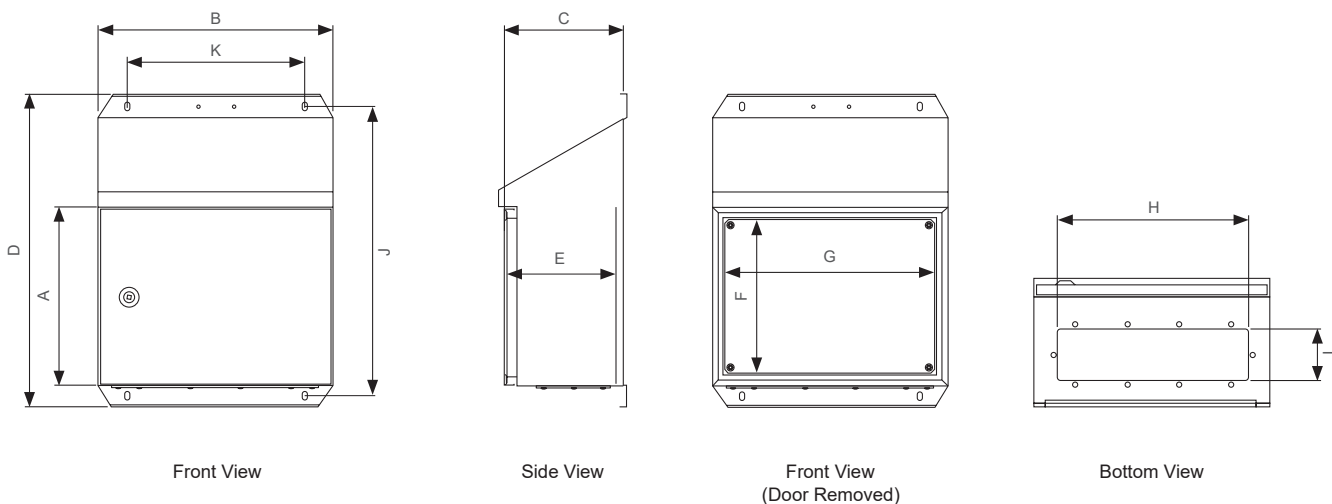

Standard Lock Supplied

Enclosure

Incline SR	NI020/S – stainless steel lock with 7mm square stainless steel insert
------------	---



Additional Lock Options

Product	Description	Part Number	Standard Lock/Insert	Alternative insert	Keys	
					Lockable handles	Aluminium, 4-way
Turnbuckle	chromed steel	NI020	7mm square – steel	See below		SKZ
	powdercoated	NI020/PS	7mm square – stainless steel	See below		SKZ
	stainless steel	NI020/S	7mm square – stainless steel	See below		SKZ
		NI028/S	8mm square slotted – stainless steel	See below		SK8
Wing knob	lockable	NI030	Key code 92268		SK3	
	non-lockable	NI111	–			
T-handle	lockable	NI040	Key code 92268		SK3	
L-handle	lockable	NI050	Key code 92268		SK3	
	padlockable – steel	NI052	–			
	padlockable – stainless steel	NI052/S	–			
Dust cap	plastic	NI020/DC	to suit NI020 lock			



LOCK INSERTS FOR 020 LOCKS

To suit lock style	Description	To suit lock	3mm double bit pin		8mm square		8mm triangle	
			Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel
Turnbuckle	chromed steel	NI020	LKINS3P		LKINS8S		LKINS8SS/S	LKIN8T
	powdercoated with SS insert	NI020/PS		LKINS3P/S		LKINS8S/S	LKINS8SS/S	LKINS8T/S
	stainless steel	NI020/S		LKINS3P/S		LKINS8S/S	LKINS8SS/S	LKINS8T/S
Key required – zinc			SKZ	SKZ	SK8	SK8	SK8	SKZ SKZ