



- Robust construction to ensure long service life.
- Region C wind rated to AS1170.2-2002: Structural design actions – Wind actions.
- Trouble free direct baying of enclosures to accommodate additional configurations.
- IP66 rated
- Manufactured from 1.6mm zinc coated steel.
- Powdercoated Light Grey RAL7035.

- Comes standard with:
- Large 3mm aluminium gland plate
 - Stainless steel door hinges
 - 3-point locking
 - Recessed padlockable swing handle and a 92268 keyed cylinder
 - Document holder
 - Multiple Earth Neutral (MEN) link provided
 - Includes AS/NZS 61439 compliance documentation.



ORDERING GUIDE


Metalware Assembled
No functional devices, wiring or labels included.

External Dimensions (mm)					Main Switch Section	Available Metering Configuration	Sub Main Section	Mounting
Part Number	Height^	Width	Depth	Max. Incomer mm ²				
TGXS11M1P^	1970	670	480	95	Space for Schneider MCCB Max 250A	11 x single phase 5 x 3 phase	27 Pole DIN (no devices)	Plinth


^ Height includes plinth.

TECHNICAL DRAWINGS & COMPONENTS

TGXS11M1P

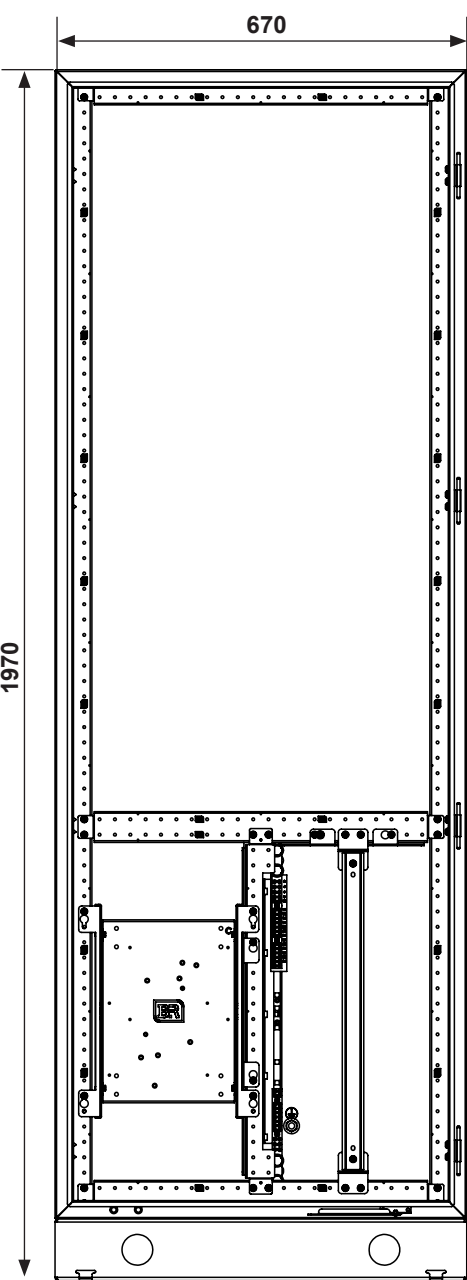

Front View

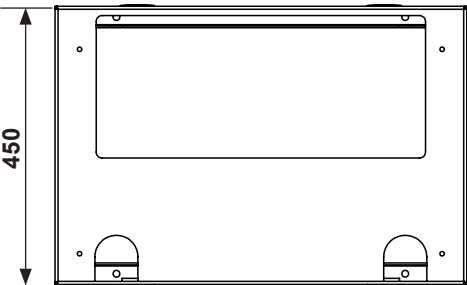

Bottom View



Components Included

TGBPRM18H06W
TGQPRM01H06W/1
TGD27P0603
TGD27PEN
TGMC0603/C
TGP1206
TGYPLK
TGYSC18H
LK400A7C150
LK400A7C150

These components come from the Infinity 3G Modular Switchboard range which are used to manufacture this pre-configured switchboard product.