


NOX10


Wall-mount air conditioners
for outdoor applications

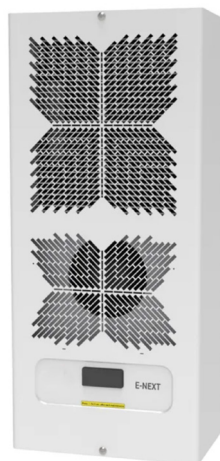


1000W

COOLING CAPACITY

DIMENSIONS (mm)

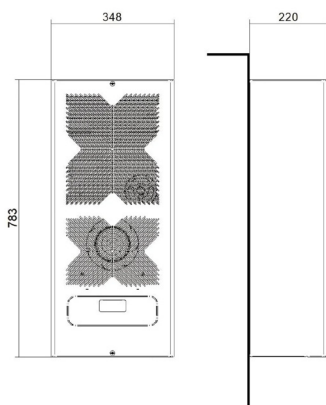

PERFORMANCE

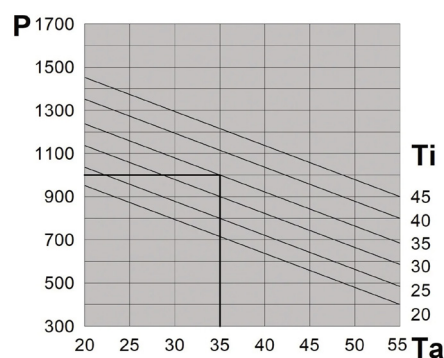

P = Cooling capacity (W)

Ta = Ambient Temperature (°C)

Ti = Internal cabinet temperature (°C)

TECHNICAL SPECIFICATIONS

FEATURES	UoM	NOX10B0E1C0000	NOX10K0E1C0000	NOX10B0E1U0000	NOX10C0E1U0000
Cooling capacity EN14511 - A35A35	W	1000	1000	1000	1000
Cooling capacity EN14511 - A35A50	W	760	760	760	760
Power supply	V ~ Hz	230 - 1 - 50/60	400/460 - 2 - 50/60	230 - 1 - 50/60	115 - 1 - 60
Width - Height - Depth	mm	348 - 783 - 220	348 - 783 - 220	348 - 783 - 220	348 - 783 - 220
Max current	A	3	1.7	3	5.7
Inrush current	A	13.1	7.5	13.1	28
T Fuse	A	6	4	6	10
Power draw EN14511 - A35A35	W	500	500	500	570
Power draw EN14511 - A35A50	W	600	600	600	670
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m³/h	540	540	540	540
Internal temperature range	°C	20 - 45	20 - 45	20 - 45	20 - 45
Temperature regulation	-	Electronic thermostat TX-i40 factory set to 35°C, with 3m cable and DIN rail installation kit			
External temperature range	°C	-20 – +55	-20 – +55	-20 – +55	-20 – +55
Ingress protection - cabinet side	-	IP55	IP55	NEMA TYPE 4/4X	NEMA TYPE 4/4X
Noise level	dB (A)	65	65	65	65
Weight	kg	27	29	27	27
Conformity	-	EN 60335-1 EN 60335-2-40 EN 60335-2-41	EN 60335-1 EN 60335-2-40 EN 60335-2-41	EN 60335-1 EN 60335-2-40 EN 60335-2-41	EN 60335-1 EN 60335-2-40 EN 60335-2-41

* Type 4X only in stainless steel framework version