


NOX16


Wall-mount air conditioners
for outdoor applications

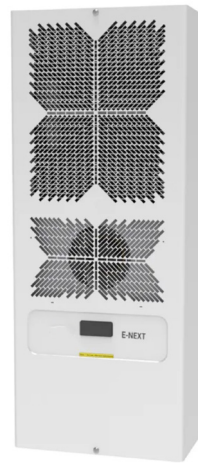


1600W

COOLING CAPACITY

DIMENSIONS (mm)

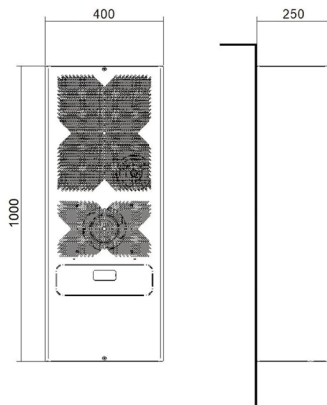

PERFORMANCE

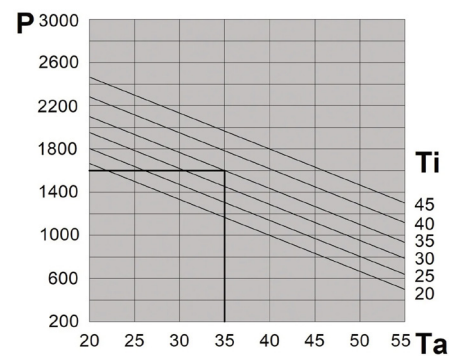

P = Cooling capacity (W)

Ta = Ambient Temperature (°C)

Ti = Internal cabinet temperature (°C)

TECHNICAL SPECIFICATIONS

FEATURES	UoM	NOX16B0E1C0000	NOX16K0E1C0000	NOX16B0E1U0000	NOX16C0E1U0000
Cooling capacity EN14511 - A35A35	W	1600	1600	1600	1600
Cooling capacity EN14511 - A35A50	W	1100	1100	1100	1100
Power supply	V ~ Hz	230 - 1 - 50/60	400/460 - 2 - 50/60	230 - 1 - 50/60	115 - 1 - 60
Width - Height - Depth	mm	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250
Max current	A	3.9	2.2	4.3	8.2
Inrush current	A	16.2	9.3	19.7	42
T Fuse	A	6	4	8	16
Power draw EN14511 - A35A35	W	720	720	720	830
Power draw EN14511 - A35A50	W	820	820	820	960
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m³/h	540	540	540	540
Internal temperature range	°C	20 - 45	20 - 45	20 - 45	20 - 45
Temperature regulation	-	Electronic thermostat TX-i40 factory set to 35°C, with 3m cable and DIN rail installation kit			
External temperature range	°C	-20 – +55	-20 – +55	-20 – +55	-20 – +55
Ingress protection - cabinet side	-	IP55	IP55	NEMA TYPE 4/4X	NEMA TYPE 4/4X
Noise level	dB (A)	65	65	65	65
Weight	kg	41	43	41	41
Conformity	-	CE UK	CE UK	CE UK	CE UK

* Type 4X only in stainless steel framework version