


NOX20


Wall-mount air conditioners
for outdoor applications

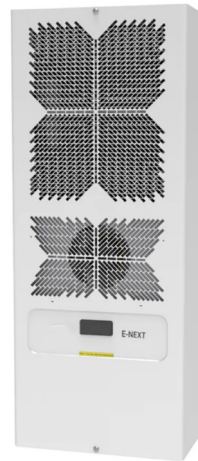


2000W

COOLING CAPACITY

DIMENSIONS (mm)

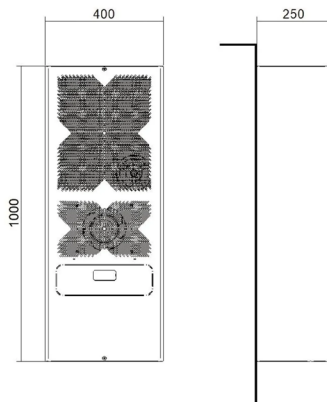

PERFORMANCE

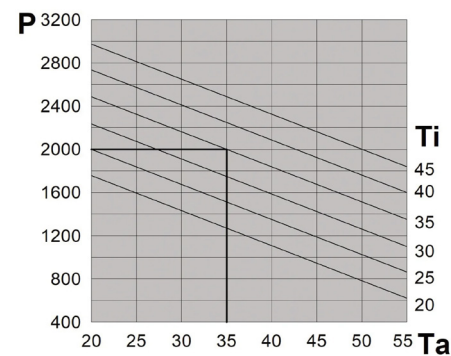

P = Cooling capacity (W)

Ta = Ambient Temperature (°C)

Ti = Internal cabinet temperature (°C)

TECHNICAL SPECIFICATIONS

FEATURES	UoM	NOX20B0E1C0000	NOX20H0E1C0000	NOX20H0E1C0000	NOX20H0E1C0000
Cooling capacity EN14511 - A35A35	W	2000	2000	2000	2000
Cooling capacity EN14511 - A35A50	W	1500	1500	1500	1500
Power supply	V ~ Hz	230 - 1 - 50/60	400/3/50 - 460/3/60	230 - 1 - 50/60	115 - 1 - 60
Width - Height - Depth	mm	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250
Max current	A	4.8	1.6	4.8	11.3
Inrush current	A	21.8	12	21.8	56.8
T Fuse	A	10	4	10	16
Power draw EN14511 - A35A35	W	990	870	990	1170
Power draw EN14511 - A35A50	W	1130	1050	1130	1360
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m³/h	885	885	885	885
Internal temperature range	°C	20 - 45	20 - 45	20 - 45	20 - 45
Temperature regulation	-	Electronic thermostat TX-i40 factory set to 35°C, with 3m cable and DIN rail installation kit			
External temperature range	°C	-20 – +55	-20 – +55	-20 – +55	-20 – +55
Ingress protection - cabinet side	-	IP55	IP55	NEMA TYPE 4/4X	NEMA TYPE 4/4X
Noise level	dB (A)	65	65	65	65
Weight	kg	42	44	42	42
Conformity	-	CE UK	CE UK	CE UK	CE UK

* Type 4X only in stainless steel framework version