


NOX30

Wall-mount air conditioners
for outdoor applications




3000W


COOLING CAPACITY

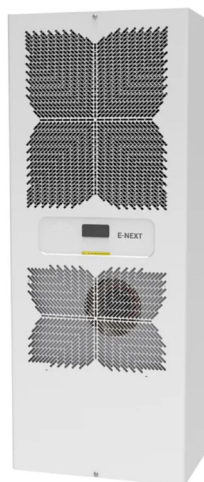

DIMENSIONS (mm)

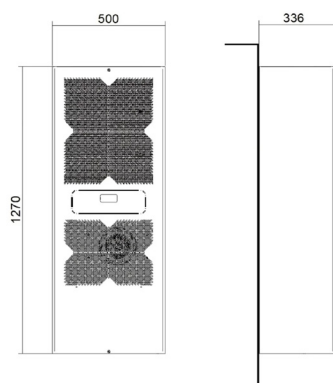

PERFORMANCE

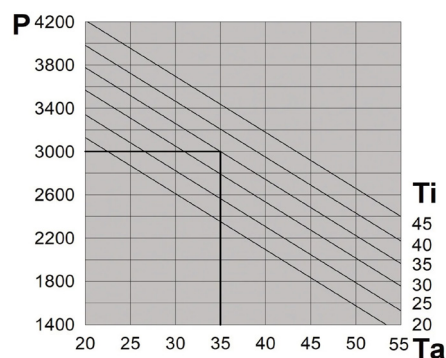

P = Cooling capacity (W)

Ta = Ambient Temperature (°C)

Ti = Internal cabinet temperature (°C)

TECHNICAL SPECIFICATIONS

FEATURES	UoM	NOX30B0E1C0000	NOX30H0E1C0000
Cooling capacity EN14511 - A35A35	W	3000	3000
Cooling capacity EN14511 - A35A50	W	2210	2210
Power supply	V ~ Hz	230 - 1 - 50/60	400/3/50 - 460/3/60
Width - Height - Depth	mm	500 - 1270 - 336	500 - 1270 - 336
Max current	A	5.2	2.4
Inrush current	A	35	20
T Fuse	A	10	6
Power draw EN14511 - A35A35	W	1190	1140
Power draw EN14511 - A35A50	W	1380	1350
Electrical connection	-	4-pin plug	4-pin plug
Cabinet air fan capacity	m³/h	1500	1500
Internal temperature range	°C	20 - 45	20 - 45
Temperature regulation	-	Electronic thermostat TX-i40 factory set to 35°C, with 3m cable and DIN rail installation kit	
External temperature range	°C	-20 – +55	-20 – +55
Ingress protection - cabinet side	-	IP55	IP55
Noise level	dB (A)	70	70
Weight	kg	66	70
Conformity	-	EN CE UK	EN CE UK

* Type 4X only in stainless steel framework version