


NOX40


Wall-mount air conditioners
for outdoor applications

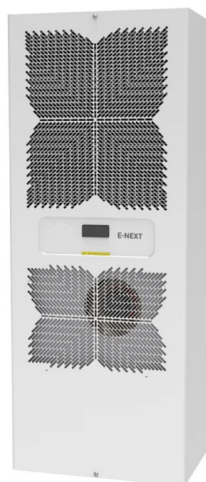


3850W

COOLING CAPACITY

DIMENSIONS (mm)

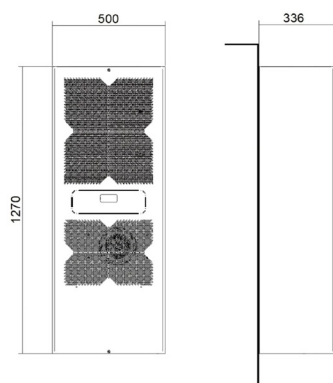

PERFORMANCE

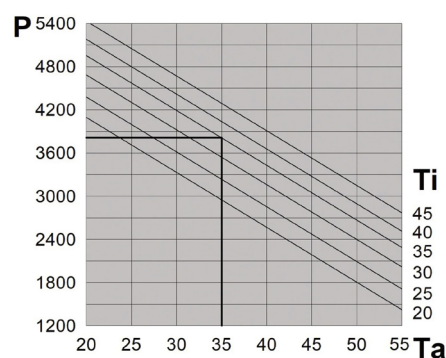

P = Cooling capacity (W)

Ta = Ambient Temperature (°C)

Ti = Internal cabinet temperature (°C)

TECHNICAL SPECIFICATIONS

FEATURES	UoM	NOX40B0E1C0000	NOX40H0E1C0000	NOX40B0E1U0000
Cooling capacity EN14511 - A35A35	W	3850	3850	3850
Cooling capacity EN14511 - A35A50	W	2650	2650	2650
Power supply	V ~ Hz	230 - 1 - 50/60	400/3/50 - 460/3/60	230 - 1 - 50/60
Width - Height - Depth	mm	500 - 1270 - 336	500 - 1270 - 336	500 - 1270 - 336
Max current	A	7.8	3.1	7.8
Inrush current	A	37	16	37
T Fuse	A	16	6	16
Power draw EN14511 - A35A35	W	1670	1580	1670
Power draw EN14511 - A35A50	W	1980	1920	1980
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m³/h	1500	1500	1500
Internal temperature range	°C	20 - 45	20 - 45	20 - 45
Temperature regulation	-	Electronic thermostat TX-i40 factory set to 35°C, with 3m cable and DIN rail installation kit		
External temperature range	°C	-20 – +55	-20 – +55	-20 – +55
Ingress protection - cabinet side	-	IP55	IP55	NEMA TYPE 4/4X
Noise level	dB (A)	70	70	70
Weight	kg	70	74	70
Conformity	-	EAR CE UK	EAR CE UK	EAR CE UK

* Type 4X only in stainless steel framework version