



- Designed in sizes suitable for the most common mining, mineral processing and infrastructure projects.
- Typically used in local control stations, mini control consoles or motor isolation control stations.
- 30° sloping roof to prevent build up of water and solids.
- Lifting lugs conform to AS4991: *Lifting Devices*.
- One (1) tonne SWL on each lifting lug (excluding SP040425).
- Easy installation with top and bottom mounting flanges.
- Conformity, Approvals:
Lloyds Register #06/10007 (E2)
- Region D wind rated to AS1170.2-2002:
Structural design actions - Wind actions
- Manufactured from 2mm zinc coated steel.
- Powdercoated X15 orange.

Comes standard with:

- 2mm steel mounting pan powdercoated white
- Chrome steel padlockable swing handle with LockSock®
- 3-point locking (excluding SP040425 range)
- 6mm aluminium gland plate
- Lifting lugs (excluding SP040425 range)




ORDERING GUIDE

Part Number	Dimensions (mm)											Weight (kg)
	External				Internal	Mounting Pan		Gland Opening		Mounting Centres		
	Height (A)	Width (B)	Depth (C)	Total Height (D)	Usable Depth (E)*	Height (F)	Width (G)	Width (H)	Depth (I)	Height (J)	Width (K)	
SP070522	700	500	200	952	153	630	430	420	100	920	400	39
SP100822	1000	800	200	1250	153	930	730	720	100	1218	700	73
SP040425	400	400	250	679	203	330	330	320	140	641	300	25
SP070535	700	500	350	1037	303	630	430	420	240	1005	400	47
SP100840	1000	800	400	1365	353	930	730	640	210	1334	600	88

* Mounting pan to inside of door

TECHNICAL DRAWINGS

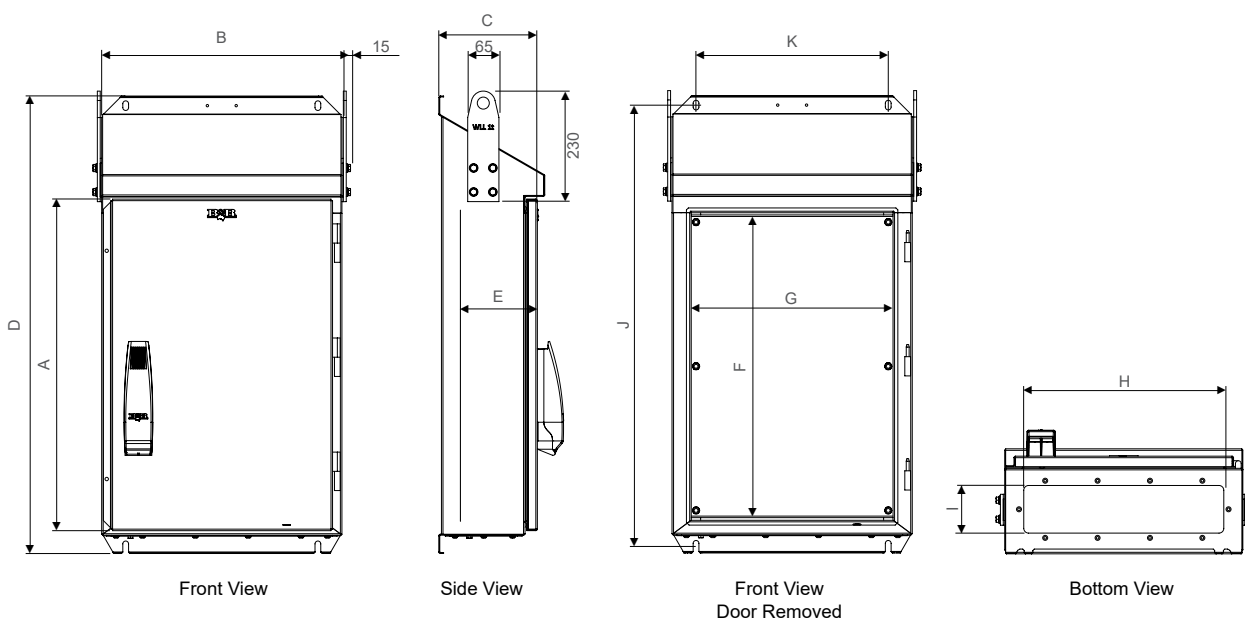

Pilbara SP – Zinc Coated Steel

Mining and Industrial Enclosures

ACCESSORIES

Product	Description	Part Number	Dimensions (mm)			SP070522	SP100822	SP040425	SP070535	SP100840
			Height	Width	Depth					
Hinged escutcheon		SPHE0404	325	320	18			•		
		SPHE0705	625	420	18	•			•	
		SPHE1008	925	720	18		•			•
Gland plate	Brass	SPGB32/6	380	200	6			•		
		SPGB41/6 [▲]	480	160	6	•				
		SPGB43/6	480	300	6				•	
		SPGB71/6 [▲]	780	160	6		•			
		SPGB72/6 [▲]	700	270	6					•
	Aluminium	SPGA32/6	380	200	6			•		
		SPGA41/6	480	160	6	•				
		SPGA43/6	480	300	6				•	
		SPGA71/6	780	160	6		•			
		SPGA72/6	700	270	6					•
Pintle hinge	316 stainless steel	SP/H/S	–	–	–	•	•	•	•	•
Retro-fit sunshades	Zinc coated steel (2mm) – powdercoated X15 Orange	SPSK040425 [▲]	400	400	270			•		
		SPSK070522 [▲]	700	500	220	•				
		SPSK070535 [▲]	700	500	370				•	
		SPSK100822 [▲]	1000	800	220		•			
		SPSK100840 [▲]	1000	800	400					•
LED light kit	12V	BRLED300	–	300	–	•		•	•	
		BRLED500	–	500	–		•			
	24V	BRLED300/24	–	300	–	•		•	•	
		BRLED500/24	–	500	–					•
Light mounting kit	To suit LED light kits	IPLKB04 [^]	–	–	–			•		
		SPLKB05 ^{^▲}	–	–	–	•			•	
		IPLKB08 [^]	–	–	–		•			•

* Does not come with a front sunshade.

[^] Light not included, purchased separately

[▲] Available on request



- Designed in sizes suitable for the most common mining, mineral processing and infrastructure projects.
- Typically used in local control stations, mini control consoles or motor isolation control stations.
- 30° sloping roof to prevent build up of water and solids.
- Lifting lugs conform to AS4991: *Lifting Devices*.
- One (1) tonne SWL on each lifting lug (excluding SP040425).
- Easy installation with top and bottom mounting flanges.
- Conformity, Approvals:
Lloyds Register #06/10007 (E2)
- Region D wind rated to AS1170.2-2002:
Structural design actions - Wind actions
- Manufactured from 1.5mm 316 stainless steel.
- N4 surface finish or powdercoated X15 orange.

Comes standard with:

- 2mm steel mounting pan powdercoated white
- Stainless steel padlockable swing handle with LockSock®
- 3-point locking (excluding SP040425 range)
- 2mm stainless steel gland plate
- Lifting lugs (excluding SP040425 range)




ORDERING GUIDE

		Dimensions (mm)													
Part Number		External				Internal	Mounting Pan		Gland Opening		Mounting Centres		Weight		
		Height (A)	Width (B)	Depth (C)	Total Height (D)	Usable Depth (E)*	Height (F)	Width (G)	Width (H)	Depth (I)	Height (J)	Width (K)	/S (kg)	/SRO (kg)	
316SS (N4)	X15 Orange	700	500	200	952	153	630	430	420	100	920	400	34	35	
SP070522/S	SP070522/SRO	1000	800	200	1250	153	930	730	720	100	1218	700	61	65	
SP040425/S	SP040425/SRO	400	400	250	679	203	330	330	320	140	641	300	20	21	
SP070535/S	SP070535/SRO	700	500	350	1037	303	630	430	420	240	1005	400	40	42	
SP100840/S	SP100840/SRO	1000	800	400	1365	353	930	730	640	210	1334	600	73	78	

* Mounting pan to inside of door

TECHNICAL DRAWINGS

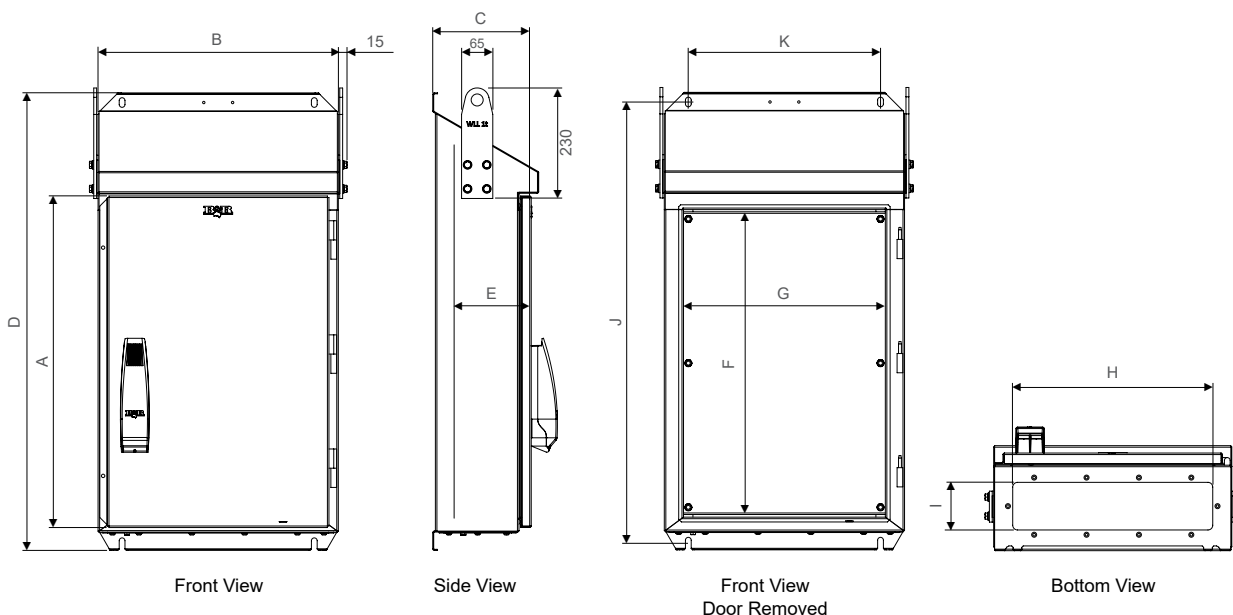

Pilbara SP – 316 Stainless Steel

Mining and Industrial Enclosures

ACCESSORIES

Product	Description	Part Number	Dimensions (mm)			SP070522/S	SP100822/S	SP040425/S	SP070535/S	SP100840/S
			Height	Width	Depth					
Hinged escutcheon		SPHE0404	325	320	18			•		
		SPHE0705	625	420	18	•			•	
		SPHE1008	925	720	18		•			•
Gland plate	Brass	SPGB32/6	380	200	6			•		
		SPGB41/6 [▲]	480	160	6	•				
		SPGB43/6	480	300	6				•	
		SPGB71/6 [▲]	780	160	6		•			
		SPGB72/6 [▲]	700	270	6					•
		SPGA32/6	380	200	6			•		
	Aluminium	SPGA41/6	480	160	6	•				
		SPGA43/6	480	300	6				•	
		SPGA71/6	780	160	6		•			
		SPGA72/6	700	270	6					•
Pintle hinge	316 stainless steel	SP/H/S	–	–	–	•	•	•	•	•
Retro-fit sunshades*	316 stainless steel (1.5mm) - N4 finish	SPSK040425/S [▲]	400	400	270			•		
		SPSK070522/S [▲]	700	500	220	•				
		SPSK070535/S [▲]	700	500	370				•	
		SPSK100822/S [▲]	1000	800	220		•			
		SPSK100840/S [▲]	1000	800	400					•
	316 stainless steel (1.5mm) – X15 powdercoated	SPSK040425/SRO [▲]	400	400	270			•		
		SPSK070522/SRO [▲]	700	500	220	•				
		SPSK070535/SRO [▲]	700	500	370				•	
		SPSK100822/SRO [▲]	1000	800	220		•			
		SPSK100840/SRO [▲]	1000	800	400					•
LED light kit	12V	BRLED300	–	300	–	•		•	•	
		BRLED500	–	500	–		•			
	24V	BRLED300/24	–	300	–	•		•	•	
		BRLED500/24	–	500	–					•
Light mounting kit	To suit LED light kits	IPLKB04 [▲]	–	–	–			•		
		SPLKB05 ^{▲▲}	–	–	–	•			•	
		IPLKB08 [▲]	–	–	–		•			•

* Does not come with a front sunshade.

[▲] Light not included, purchased separately

^{▲▲} Available on request

Our LED lighting solutions provide light inside an enclosure when visibility is required for both safety and efficacy.



Compact, high-output LED lighting designed to enhance visibility within enclosures and rack systems. Up to four light units can be daisy chained from a single power supply, with linking capability of up to 36W per run. Lights can be mounted directly to 19" rack rails, with optional mounting kits available for enclosures without rack rails.

When roof-mounted, the slim-profile design allows unobstructed operation of full-height swing frames and hinged escutcheons. An optional PIR motion sensor provides automatic switching for improved energy efficiency.

B&R's LED lighting solutions are applied to provide excess light within an enclosure and becomes a continuous light source to provide extra visibility.

- Energy saving up to 50% compared with traditional fluorescents under the same lux.
- Life span – over 50,000 hours
- Colour temperature: warm white.
- Available in 12V and 24V options.
- Easy linking up to 36 watts per run.
- Easy to install.
- Low voltage — safe and efficient.
- Manufactured from aluminium with black plastic end caps and acrylic lens.
- Light source – SM3528 LED
- Operating temperature – -20°C to 40°C indoors



This information is provided as a guide only. Contact your local sales representative to discuss your requirements.

Technical Operating Data

Length (mm)	Voltage (DC)	Power (W)	Radiance	Colour Temp	Luminous Flux (lm)*	LED Current (A)
300	12/24	3	90°	4400	280/360	0.18
500	12/24	5	90°	4400	460/600	0.18

Pilbara SP

Part Number	Power (V)	Inclusions					Required Mounting Bracket			Width (mm)	Optional
		LED Light	Power Supply	Splitter	Switch	Connectors	IPLKB04	SPLKB05	IPLKB08		
BRLED300	12	•	•		•		•			400	BRMOT PIR Motion Sensor
BRLED300/24	24	•	•		•		•			400	
BRLED500	12	•	•		•			•	•	500 or 800	
BRLED500/24	24	•	•		•			•	•	500 or 800	
BRLEDK03	–	•		•		•	•			400	
BRLEDK05	–	•		•		•		•	•	800	

Locks

Standard Locks

Enclosure	Zinc Coated Steel	Stainless Steel
Pilbara SP	SP/LCK – chromed steel padlockable swing handle with LockSock®	SP/LCK/S – stainless steel padlockable swing handle with LockSock®

Lock Options for Special Purpose Enclosures

There are a number of lock options available that are suitable for use on special purpose enclosures. Contact your local sales representative to discuss your requirements.

Product	Description	Part Number	Standard Lock/Insert	Alternative insert	Key	
					Lockable handles	Aluminium, 4-way
Turnbuckle	chromed steel	NI020	7mm square – steel	See page 4		SKZ
		DD020	7mm square – steel	See page 4		SKZ
	powdercoated	NI020/PS	7mm square – stainless steel	See page 4		SKZ
		DD020/PS	7mm square – stainless steel	See page 4		SKZ
	stainless steel	NI020/S	7mm square – stainless steel	See page 4		SKZ
		NI028S/S	8mm square slotted – stainless steel	See page 4		
Wing knob	lockable	NI030	Key code 92268		SK3	
		DD030	Key code 92268		SK3	
	non-lockable	NI111	–			
		DD111	–			
T-handle	lockable	NI040	Key code 92268		SK3	
		DD040	Key code 92268		SK3	
L-handle	lockable	NI050	Key code 92268		SK3	
		DD050	Key code 92268		SK3	
	padlockable – steel	NI052	–			
		DD052	–			
	padlockable – stainless steel	NI052/S	–			
		DD052/S	–			
Swing handle	padlockable – steel	SP/LCK	–			
	padlockable – stainless steel	SP/LCK/S	–			
LockSock®	plastic	SP/LCK/DC	To suit SP/LCK			
Dust cap	plastic	NI020/DC	To suit NI020 lock			



Lock Inserts for Locks

The NI020 locks are available with an option lock insert for use on all special purpose enclosures. Contact your local sales engineer to discuss your requirements.

To suit lock style	Description	To suit lock	Standard Insert	3mm double bit pin		8mm square		8mm square slotted	8mm triangle	
				Steel	Stainless Steel	Steel	Stainless Steel	Stainless Steel	Steel	Stainless Steel
Turnbuckle	chromed steel	NI020 or DD020	7mm square – steel	LKINS3P		LKINS8S		LKINS8SS/S	LKIN8T	
	powdercoated with SS insert	NI020/PS or DD020/PS	7mm square – stainless steel		LKINS3P/S		LKINS8S/S	LKINS8SS/S		LKINS8T/S
	stainless steel	NI020/S or DD020/PS	7mm square – stainless steel		LKINS3P/S		LKINS8S/S	LKINS8SS/S		LKINS8T/S
Key required – aluminium			SKZ	SKZ	SKZ	SK8	SK8	SK8	SKZ	SKZ