

Double Door – LQDD




INCLUSIONS

- Symmetrical door with mullion – first closing
- Symmetrical door with lock – second closing
- 19x19mm door stiffener rail
- 4 hinge and 2 locking points on first closing door
- 4 hinge and locking points on second closing door
- Keylockable swing handle (92268)
- Earth strap kit

LOCK OPTIONS

- Padlockable swing handle (LQLPAD)
- Lock assembly 7mm square ¼ turn (LQLA7S)
 - Lock insert 8mm triangle
 - Lock insert 3mm double bit

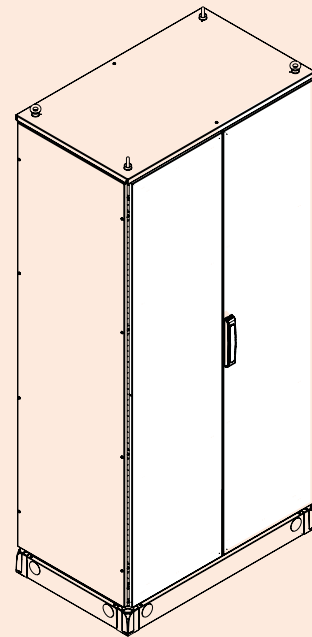

LOAD
80kg



iLINQ LQD Doors Assembly Manual
« QR Download

ADVANTAGE


- Support loads up to 80kg per door
- 4 hinge and locking points
- Symmetrical design
- Quick & easy installation
- No centre mullion to impede access
- Quick action lock for first closing door
- 1st & 2nd closing doors can be reversed

MATERIALS

- Body – zinc coated steel
- Thickness – 1.6mm
- Gasket – polyurethane formed in place

FINISH

- Powdercoated Light Grey RAL7035

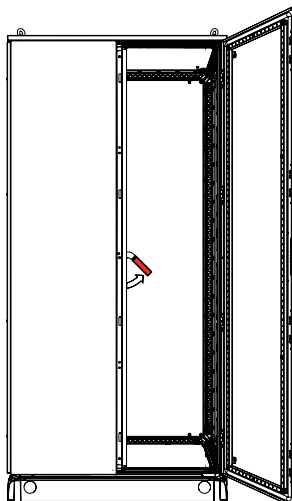

Internal lock for first closing door



Internal lock for first closing door



Keylockable Swing Handle (92268)



Polyurethane gasket and hinge pins



Locking rod latch




DID YOU KNOW?

iLINQ's unique symmetrical design allows doors to be rotated and rehinged by one person in under 5 minutes.



HELPFUL HINT:

Locking options for doors are available and can be found on page 76

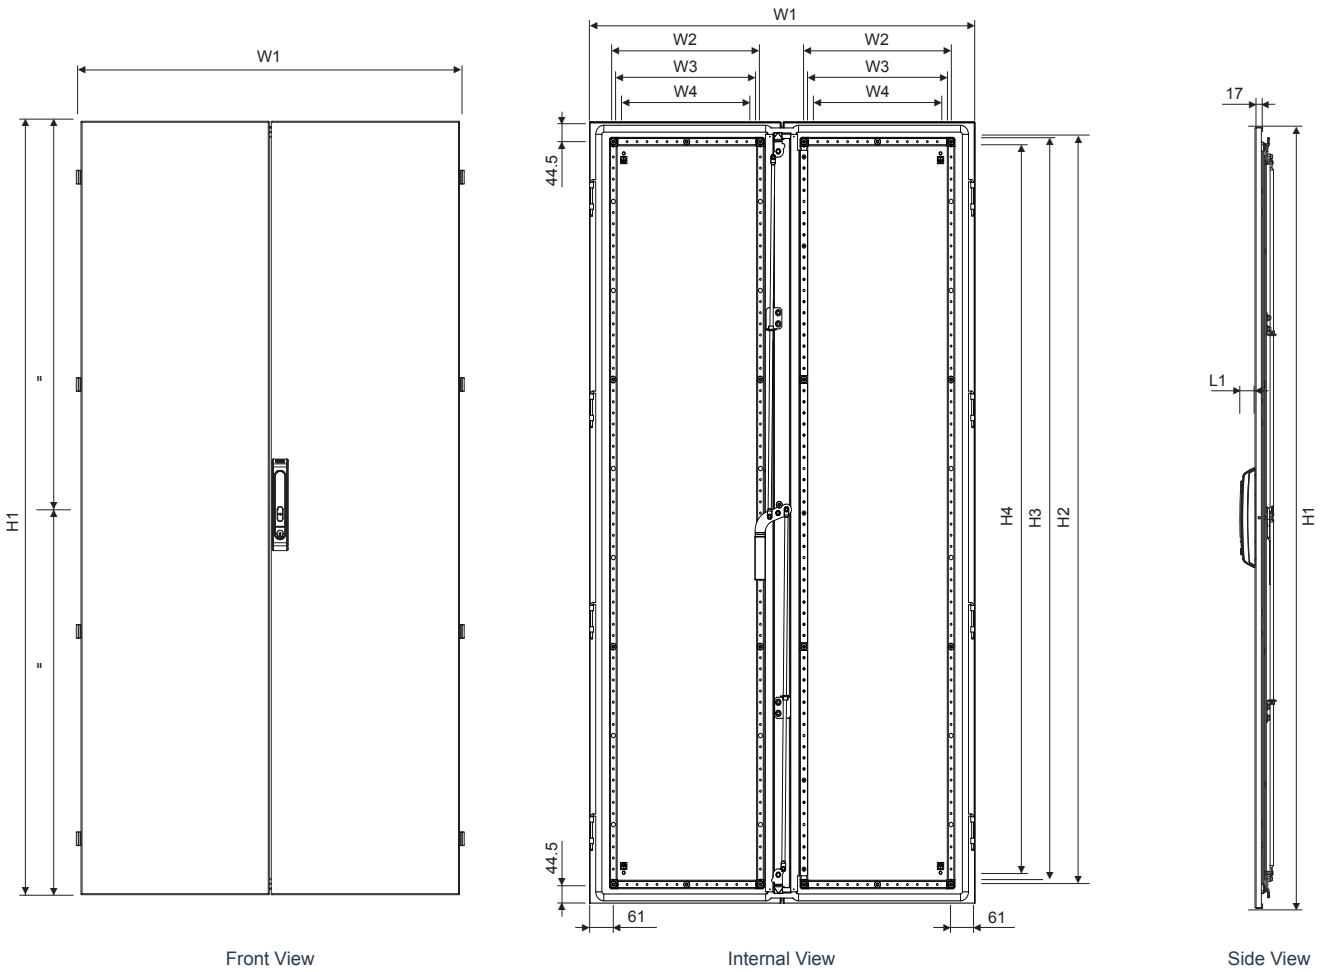

3.0 Assembled to Order

Catalogue No			Dimensions (mm)							
			External Double Door		Door Rail Fixing Points		Internal Stiffener Rail		Window Opening	
Solid Door	Window Door	Vented Door	Height (H1)	Width (W1)	Height (H2)	Width (W2)	Height (H3)	Width (W3)	Height (H4)	Width (W4)
LQDD1406	LQDD1406/W	LQDD1406/V	1358	568	1269	169	1250	150	1220	120
LQDD1408	LQDD1408/W	LQDD1408/V	1358	768	1269	269	1250	250	1220	220
LQDD1410	LQDD1410/W	LQDD1410/V	1358	968	1269	369	1250	350	1220	320
LQDD1412	LQDD1412/W	LQDD1412/V								
LQDD1606	LQDD1606/W	LQDD1606/V	1558	568	1469	169	1450	150	1420	120
LQDD1608	LQDD1608/W	LQDD1608/V	1558	768	1469	269	1450	250	1420	220
LQDD1610	LQDD1610/W	LQDD1610/V	1558	968	1469	369	1450	350	1420	320
LQDD1612	LQDD1612/W	LQDD1612/V	1558	1168	1469	469	1450	450	1420	420
LQDD1806	LQDD1806/W	LQDD1806/V	1758	568	1669	169	1650	150	1620	120
LQDD1808	LQDD1808/W	LQDD1808/V	1758	768	1669	269	1650	250	1620	220
LQDD1810	LQDD1810/W	LQDD1810/V	1758	968	1669	369	1650	350	1620	320
LQDD1812	LQDD1812/W	LQDD1812/V	1758	1168	1669	469	1650	450	1620	420
LQDD2006	LQDD2006/W	LQDD2006/V	1958	568	1869	169	1850	150	1820	120
LQDD2008	LQDD2008/W	LQDD2008/V	1958	768	1869	269	1850	250	1820	220
LQDD2010	LQDD2010/W	LQDD2010/V	1958	968	1869	369	1850	350	1820	320
LQDD2012	LQDD2012/W	LQDD2012/V	1958	1168	1869	469	1850	450	1820	420
LQDD2206	LQDD2206/W	LQDD2206/V	2158	568	2069	169	2050	150	2020	120
LQDD2208	LQDD2208/W	LQDD2208/V	2158	768	2069	269	2050	250	2020	220
LQDD2210	LQDD2210/W	LQDD2210/V	2158	968	2069	369	2050	350	2020	320
LQDD2212	LQDD2212/W	LQDD2212/V	2158	1168	2069	469	2050	450	2020	420

Lock Type	Width (L1)
Hasp Swing handle (LQLPAD)	60mm
Swing handle (LQLS/92268) (Standard)	36mm
1/4 Turn (LQLA7S)	26.5mm