


NOX60


Wall-mount air conditioners
for outdoor applications

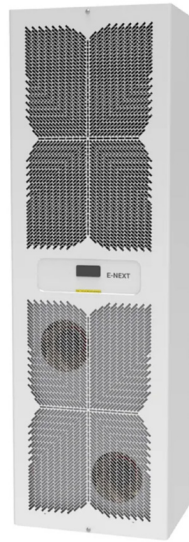


5400W

COOLING CAPACITY

DIMENSIONS (mm)

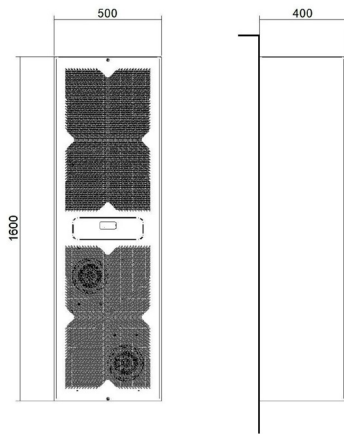

PERFORMANCE

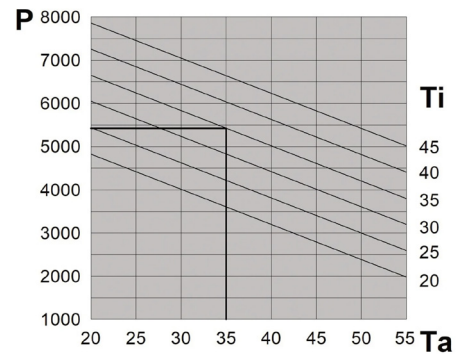

P = Cooling capacity (W)
Ta = Ambient Temperature (°C)
Ti = Internal cabinet temperature (°C)

TECHNICAL SPECIFICATIONS

| FEATURES | UoM | NXT60H0E1C0000 | NXT60H0E1U0000 |
|-----------------------------------|-------------------|--|---------------------|
| Cooling capacity EN14511 - A35A35 | W | 5400 | 5400 |
| Cooling capacity EN14511 - A35A50 | W | 4200 | 4200 |
| Power supply | V ~ Hz | 400/3/50 - 460/3/60 | 400/3/50 - 460/3/60 |
| Width - Height - Depth | mm | 500 - 1600 - 400 | 500 - 1600 - 400 |
| Max current | A | 3.7 | 3.7 |
| Inrush current | A | 32 | 32 |
| T Fuse | A | 8 | 8 |
| Power draw EN14511 - A35A35 | W | 1950 | 1950 |
| Power draw EN14511 - A35A50 | W | 2470 | 2470 |
| Electrical connection | - | 4-pin plug | 4-pin plug |
| Cabinet air fan capacity | m ³ /h | 1500 | 1500 |
| Internal temperature range | °C | 20 - 45 | 20 - 45 |
| Temperature regulation | - | Electronic thermostat TX-i40 factory set to 35°C | |
| External temperature range | °C | 20 - 55 | 20 - 55 |
| Ingress protection - cabinet side | - | IP55 | NEMA TYPE 12 |
| Noise level | dB (A) | 72 | 72 |
| Weight | kg | 104 | 104 |
| Conformity | - | | |