



- Suitable for voice or data cabling for up to 500 pairs at or beyond the network boundary.
- Supplied complete with surrounds to enable flush or surface mounting.
- Flush mount door design on A Series enclosures.
- Backmount frame and earthing strap.
- A Series IP30 and B Series IP54.
- Manufactured from 1.0mm zinc coated steel.
- Powdercoated Light Grey RAL7035.

Comes standard with:

- Coin operated camlock
- Back mount frame
- Earthing strips on 20 pair enclosures only
- Jumper guides on 100, 250 and 500 pair enclosures
- Adjustable depth surrounds



## ORDERING GUIDE

		Dimensions (mm)												
		External				Mounting Centre		Cable Entry		Knockouts				
Part Number	Application	Height (A)	Width (B)	Depth (C)	Usable Depth (D)	Height (E)	Width (F)	Height (G)	Width (H)	Width (J)	Size (K)	Weight (kg)	Modules	
A20	Internal	200	200	55	42	138	150	20	50	72	3 x ø26 / 17	1.5	2	
A100	Internal	390	290	90	77	300	230	25	100	86	3 x ø33 / 21	4.0	11	
A250	Internal	800	290	100	87	700	220	50	150	186	4 x ø52 / 41	8.5	27	
A500	Internal	800	450	100	87	700	350	50	200	248	5 x ø52 / 41	12.5	54	
B20	External	205	305	80	61	130	230	–	–	72	6 x ø26 / 17	2.5	2	
B100	External	405	305	90	71	325	225	–	–	86	6 x ø33 / 21	4.5	11	
B250	External	800	305	100	81	675	225	–	–	186	8 x ø52 / 41	9.0	27	
B500	External	800	465	100	81	675	375	–	–	248	10 x ø52 / 41	12.5	54	

NB: 20mm flush mount surround on each side, top & bottom.


## ACCESSORIES

Product	Description	Part Number
Key Locks	Keyed to 92268 complete with fixings	TKL/92268
	Keyed to L331 complete with fixings	TKL/L331



**TECHNICAL DRAWINGS**

**A Series**

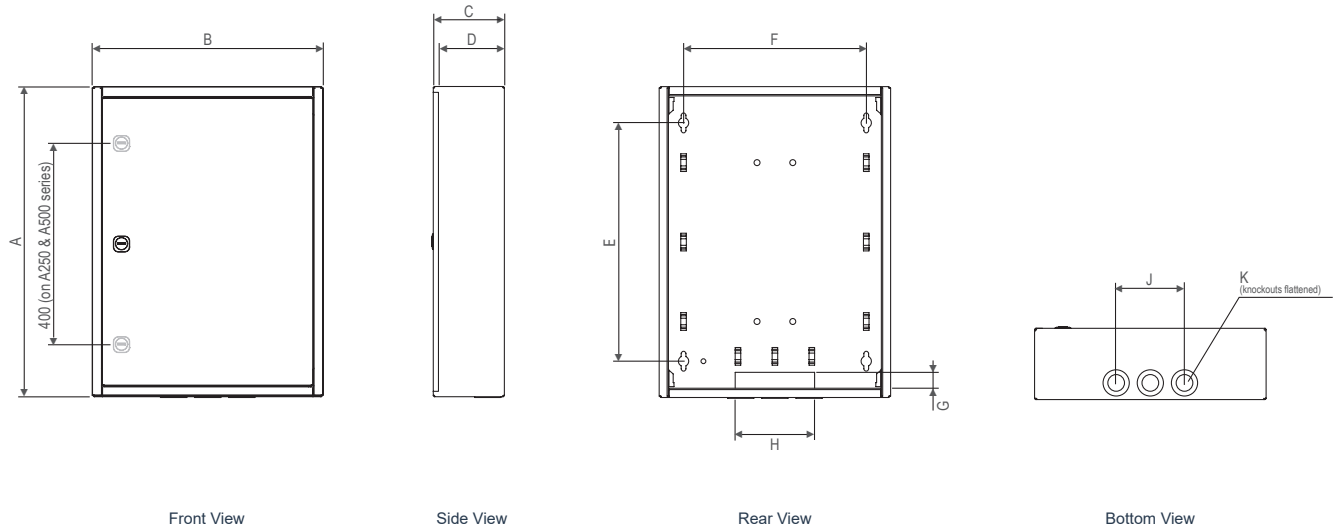

**B Series**

