



- Designed for both single and multi-phase installations.
- Durable enclosure suitable for domestic and light metering installations.
- Slide and lift off escutcheon.
- Concealed lift off hinges.
- Underground service location label.
- Double return flat face gutter.
- Manufactured from 1.0mm galvanised steel to Z275.
- Powdercoated Light Grey RAL7035 (excl. NQ/DIN)



BR1M/ECB


ORDERING GUIDE

Part Number	DIN space	Inclusions			Dimensions (mm)			Panel (mm)		
		RCCB Link#	Busbar	ID labels	Height	Width	Depth	Height	Width	Depth Behind
BR1M/ECB	22-pole	•	•	•	685	485	275	480	461	75
BR3M*					600	620	275	566	600	75
BR3M/ECB	24-pole	•	•	•	770	620	275	566	600	75

* For remote load centre installations
RCCB Links provide RCD expansion to 3 circuits

ACCESSORIES

Part Number	Description	BR1M/ECB	BR3M*	BR3M/ECB
QNPLK	Padlocking kit to suit QLD series enclosures	•	•	•

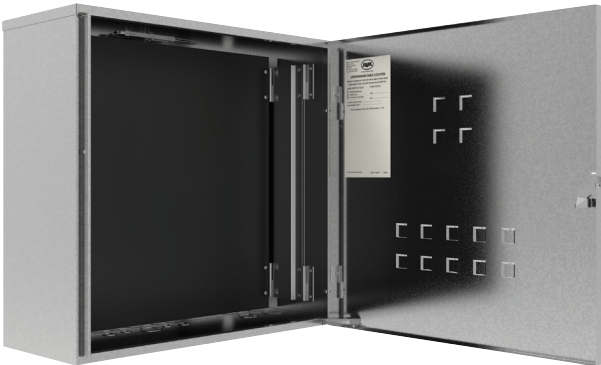

BR3M