



- Typically used for local control stations, mini-control consoles and motor isolators in conveyor runs.
- The sloped face creates an ergonomic interface when fitted with pushbuttons and control equipment.
- 15° sloping roof and 20mm overhang to prevent build up of solids.
- Conformity, Approvals:
Lloyds Register #06/10007 (E2)
- Manufactured from 1.5mm 316 stainless steel
- N4 surface finish.

Comes standard with:

- 2mm steel mounting pan powdercoated white
- 6mm brass gland plate
- Top and bottom mounting flanges
- Stainless steel lock with 7mm square stainless steel insert (NI020/S)
- Door stay and document holder
- External earthing stud
- Earth strap kit

ORDERING GUIDE

Dimensions (mm)

Part Number	External				Internal	Mounting Pan		Gland Opening		Mounting Centres		Weight (kg)
	Height (A)	Width (B)	Depth (C)	Total Height (D)	Useable Depth (E)*	Height (F)	Width (G)	Width (H)	Depth (I)	Height (J)	Width (K)	
PH040427/S	400	400	270	603	230	320	340	180	300	563	300	23.0
PH060627/S	600	600	270	803	230	520	540	180	500	763	500	38.0
PH100827/S▲	1000	800	270	1203	230	915	740	180	700	1163	700	85.0
PH120827/S▲	1200	800	270	1403	230	1120	740	180	700	1363	700	95.0
PH160827/S▲	1600	800	270	1803	230	1520	740	180	700	1763	700	105.0

* Mounting pan to inside of door

▲ Available on request


ACCESSORIES

Product	Description	Part Number	Dimensions (mm)			PH040427/S	PH060627/S	PH100827/S	PH120827/S	PH160827/S
			Height	Width	Thickness					
External vent kit	316 stainless steel	IPVK/S	130	130	—	•	•	•	•	•
		IPVK16/S▲	260	260	—	▲	▲	▲	▲	▲


▲ Fits door only

▲ Available on request


TECHNICAL DRAWINGS

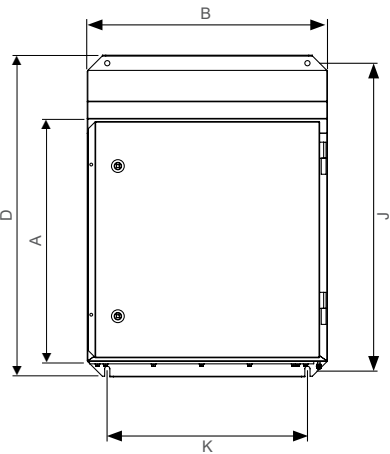


Front View



Side View



Front View
(Door Removed)



Bottom View

Locks



Standard Lock Supplied

Enclosure

Hedland PH

NI020/S – stainless steel lock with 7mm square stainless steel insert



Additional Lock Options

Product	Description	Part Number	Standard Lock/Insert	Alternative insert	Keys	
					Lockable handles	Aluminium, 4-way
Turnbuckle	chromed steel	NI020	7mm square – steel	See below		SKZ
	powdercoated	NI020/PS	7mm square – stainless steel	See below		SKZ
	stainless steel	NI020/S	7mm square – stainless steel	See below		SKZ
		NI028/S	8mm square slotted – stainless steel	See below		SK8
Wing knob	lockable	NI030	Key code 92268		SK3	
	non-lockable	NI111	–			
T-handle	lockable	NI040	Key code 92268		SK3	
L-handle	lockable	NI050	Key code 92268		SK3	
	padlockable – steel	NI052	–			
	padlockable – stainless steel	NI052/S	–			
Dust cap	plastic	NI020/DC	to suit NI020 lock			



LOCK INSERTS FOR 020 LOCKS

To suit lock style	Description	To suit lock	3mm double bit pin		8mm square		8mm triangle	
			Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel
Turnbuckle	chromed steel	NI020	LKINS3P		LKINS8S	LKINS8SS/S	LKIN8T	
	powdercoated with SS insert	NI020/PS		LKINS3P/S		LKINS8S/S		LKINS8T/S
	stainless steel	NI020/S		LKINS3P/S		LKINS8S/S		LKINS8T/S
Key required – zinc			SKZ	SKZ	SK8	SK8	SK8	SKZ