


NXT04


Door or wall-mount
air conditioners

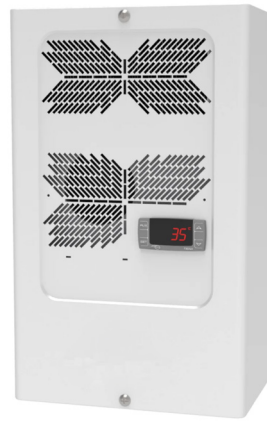


380W

COOLING CAPACITY

DIMENSIONS (mm)

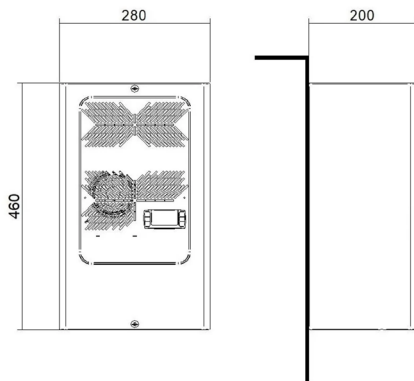

PERFORMANCE

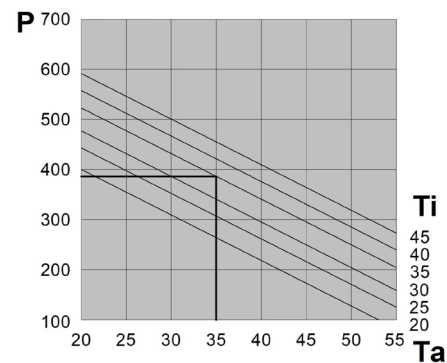

P = Cooling capacity (W)

Ta = Ambient Temperature (°C)

Ti = Internal cabinet temperature (°C)

TECHNICAL SPECIFICATIONS

FEATURES	UoM	NXT04B0T1C0000	NXT04B0T1U0000	NXT04C0T1U0000	NXT04KT1C0000
Cooling capacity EN14511 - A35A35	W	380	380	380	380
Cooling capacity EN14511 - A35A50	W	240	240	240	240
Power supply	V ~ Hz	230 - 1 - 50/60	230 - 1 - 50/60	115 - 1 - 60	400/460 - 250/60
Width - Height - Depth	mm	280 - 460 - 200	280 - 460 - 200	280 - 460 - 200	280 - 460 - 200+55*
Max current	A	1.5	1.5	3.4	0.9
Inrush current	A	8.6	8.6	22.6	5
T Fuse	A	4	4	6	2
Power draw EN14511 - A35A35	W	240	240	240	240
Power draw EN14511 - A35A50	W	277	277	277	277
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m³/h	165	165	165	165
Internal temperature range	°C	20-45	20-45	20-45	20-45
Temperature regulation	-	Electronic thermostat TX050 factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
Ingress protection - cabinet side	-	IP55	NEMA TYPE 12	NEMA TYPE 12	IP55
Noise level	dB (A)	60	60	60	60
Weight	kg	17	17	17	20
Conformity	-	CE UK	UL LISTED CE UK	UL LISTED CE UK	CE UK

** for autotransformer external dimensions semi-recessed installation version page 35